



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 09/12/2013	ACCOUNT BLISS	TRUCK 0185	DRIVER NAME DAVE UNDERWOOD	TICKET # 1087608		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH THROUGH GATE FOLLOW DIRTROAD ON LEFT TO TRACK (GO TO PUMP)				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***LITHKO'S							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 2	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION INT-FW	PREVIOUS TRUCK 97	SLUMP 5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-564	4000 PSI NO AE	120	80		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X \_\_\_\_\_  
PRINTED NAME TITLE CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
CEMENT	564 lb	5640 lb	5640 lb	0.00%				
ROCKC33#5	1717 lb	17290 lb	17300 lb	0.06%	0.70% M	14	gl	
SANDFAA	1405 lb	14443 lb	14450 lb	0.05%	2.80% M	47	gl	
WATER	33.9 gl	257.5 gl	257.0 gl	-0.18%		257.0	gl	-2.00 gl
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				

Num Batches: 1  
Design 339.0 gl Actual 318.8 gl To Add: 20.4 gl  
Water/Cement: 0.502 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL  
Water in Truck: 0.0 gl



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute®  
Certifications




Certifications

KANSAS

DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 09/13/2013	ACCOUNT BLISS	TRUCK 0174	DRIVER NAME Shawn Cool	TICKET # 1087744		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - JOB SITE IS THE REC CENTER PROJECT				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 100	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION FOOTING	PREVIOUS TRUCK 194	SLUMP 4	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	200	120		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
						SUBTOTAL	
						TAX	
						TOTAL	
						GRAND TOTAL	

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

**X**  
CUSTOMER SIGNATURE  
**NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT**

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17341 lb	17350 lb	0.05%	0.70% M	14	gl	
SANDFAA	1409 lb	14370 lb	14390 lb	0.14%	1.98% A	34	gl	
CEMENT	479 lb	4790 lb	4795 lb	0.10%				
FLYASH	85 lb	850 lb	855 lb	0.59%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
WATER	33.0 gal	271.0 gal	271.0 gal	-0.02%		271.0	gl	-2.00 gl

Num Batches: 1

Manual 13:07:45

Design 339.0 gl Actual 319.0 gl To Add: 20.0 gl

Water/Cement: 0.501 T Design 339.0 gl Actual 319.0 gl To Add: 20.0 gl

Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/14/2013	BLISS	0174	Shawn Cool	1087786

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH
JOB ADDRESS	THROUGH GATE FOLLOW DIRTROAD ON LEFT TO
6100 ROCK CHALK DR - ROCK CHALK	TRACK (GO TO PUMP)
PARK - LAWRENCE, KS	

NOTE:
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
4	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	159	4

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	120	120		
10.00	ea	SATDC	SATURDAY DELIVERY CHAF	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17272 lb	17320 lb	0.28%	0.30% M	6	gl	
SANDFAA	1409 lb	14443 lb	14470 lb	0.18%	2.51% A	42	gl	
CEMENT	479 lb	4790 lb	4805 lb	0.31%				
FLYASH	85 lb	850 lb	850 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	270.5 gl	269.0 gl	-0.54%		269.0	gl	-2.00 gl

Num Batches: 1

Design 339.0 gl Actual 317.6 gl To Add: 21.4 gl

Water/Cement: 0.500 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC

WATER IN TRUCK: 0.0 gl



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/16/2013	BLISS	0114	BRIAN LINDELOF	1087830

**CUSTOMER NAME**  
BLISS SPORTS LLC

**JOB ADDRESS**  
6100 ROCK CHALK DR - ROCK CHALK  
PARK - LAWRENCE, KS \*\*\*BLISS CR

**ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS**  
6TH ST. WEST - GEORGE WILLIAM WAY NORTH -  
STRAIGHT NORTH AT GATE



39,667

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
90	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	159	4

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	60	60		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery, if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X \_\_\_\_\_  
PRINTED NAME TITLE CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17409 lb	17410 lb	0.00%	1.10% M	23	gl	
SANDFAA	1409 lb	14400 lb	14420 lb	0.14%	2.20% M	37	gl	
CEMENT	479 lb	4790 lb	4805 lb	0.31%				
FLYASH	85 lb	850 lb	860 lb	1.18%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	259.2 gl	259.0 gl	-0.06%		259.0	gl	-2.00 gl

Manual 18:15:39

Design 339.0 gl Actual 318.9 gl To Add: 20.1 gl

Design Water/Cement: 0.499 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC

Water in Truck: 0.0 gl



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/18/2013	BLISS	0184	Wayne Grammer	1087872

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH -
JOB ADDRESS	STRAIGHT NORTH AT GATE
6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***BLISS CR	

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
32	TEC# 000003471 8	ROCKCHALKPAR			174	4

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	130	120		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN	BEFORE H2O ADDED
		<input type="checkbox"/> YES <input type="checkbox"/> NO	<input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL
TAX
TOTAL
GRAND TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 PRINTED NAME TITLE  
 X  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17582 lb	17810 lb	0.16%	2.10% M	43	gl	
SANDFAA	1409 lb	14541 lb	14570 lb	0.20%	3.20% M	54	gl	
CEMENT	479 lb	4790 lb	4795 lb	0.10%				
FLYASH	85 lb	850 lb	855 lb	0.59%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	221.6 gl	222.0 gl	0.16%		222.0	gl	-2.00 gl

usl Num Batches: 1 Manual 17:13:42  
 ed 39893 lb Design W/C: 0.502 Water/Cement: 0.501 T Design 339.0 gl Actual 319.5 gl To Add: 19.5 gl  
 mp: 4.00 in Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/19/2013	BLISS	0195	Marty Trumble	1087889

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - STRAIGHT NORTH AT GATE
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***BLISS CR	



38,263

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
89	TEC# 000003471 8	ROCKCHALKPAR		WALL	174	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-A564F	4K AE FA	80	20		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 PRINTED NAME TITLE  
 X  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1354 lb	13892 lb	13910 lb	0.13%	2.60% M	42	gl	
ROCKC33#5	1655 lb	16749 lb	16770 lb	0.13%	1.20% M	24	gl	
CEMENT	479 lb	4790 lb	4875 lb	+ 1.77%				
FLYASH	85 lb	850 lb	875 lb	+ 2.94%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	5.25 oz #	52.50 oz	53.00 oz	0.95%				
WATER	30.5 gl	219.0 gl	218.0 gl	-0.46%		218.0	gl	-2.00 gl

Num Batches: 1  
 Manual 9:13:21  
 ual 38263 lb Design W/C: 0.451 Water/Cement: 0.443 T Design 305.0 gl Actual 284.1 gl To Add: 20.9 gl  
 id mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Lcad Trim Water: -2.0 gl / CYE



# PENNY'S

**CONCRETE, INC.**

23400 W. 82ND STREET  
 SHAWNEE MISSION, KANSAS 66227-2705  
 DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
 (800) 322-9710 (800) 524-6474



www.pennysconcrete.com  
 An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/19/2013	BLISS	0195	Marty Trumble	1087924

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - STRAIGHT NORTH AT GATE
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***BLISS CR	



39,653

**NOTE:**  
 ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
 STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
71	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	119	4

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	260	210		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
 TAX  
 TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 PRINTED NAME TITLE  
 X  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17427 lb	17450 lb	0.13%	1.20% M	25	gl	
SANDFAA	1409 lb	14509 lb	14510 lb	0.01%	2.97% A	50	gl	
CEMENT	479 lb	4790 lb	4795 lb	0.10%				
FLYASH	85 lb	850 lb	860 lb	1.18%				
WREDUCE1	16.92 oz	169.20 oz	168.00 oz	-0.71%				
WATER	33.9 gl	244.0 gl	243.0 gl	-0.42%		243.0	gl	-2.00 gl

Num Batches: 1  
 Manual 15:21:35  
 id 39653 lb Design W/C: 0.502 Water/Cement: 0.500 T Design 339.0 gl Actual 318.0 gl To Add: 21.0 gl  
 mp: 4.00 in Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 09/21/2013	ACCOUNT BLISS	TRUCK 0194	DRIVER NAME Mark Ice	TICKET # 1087989		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - JOB SITE IS THE REC CENTER PROJECT				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
			39,560				
ORDER # 7	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION EXTFW	PREVIOUS TRUCK 139	SLUMP 5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-564	4000 PSI NO AE	390	300		
10.00	ea	SATDC	SATURDAY DELIVERY CHAF	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

**X**  
\_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME	TITLE	Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
		CEMENT	564 lb	5640 lb	5650 lb	0.18%				
		ROCKC33#5	1717 lb	17307 lb	17330 lb	0.13%	0.80% M	16	gl	
		SANDFAA	1405 lb	14507 lb	14500 lb	-0.05%	3.25% A	55	gl	
		WATER	33.9 gl	247.8 gl	248.0 gl	0.08%		248.0	gl	-2.00 gl
		WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				

Num Batches: 1  
Manual 8:30:51  
ual 39560 lb Design W/C: 0.502 Water/Cement: 0.501 T Design 339.0 gl Actual 319.2 gl To Add: 19.8 gl  
id 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT  
mp:





# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 09/23/2013	ACCOUNT BLISS	TRUCK 0174	DRIVER NAME Shawn Cool	TICKET # 1088117		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH THROUGH GATE FOLLOW DIRTROAD ON LEFT				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
			22,908				
ORDER # 117	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION WALL	PREVIOUS TRUCK 129		
SLUMP 5							
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
6.00	CYDS	40-A564F	4K AE FA	22	22		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE X \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1354 lb	8384 lb	8400 lb	0.19%	3.20% M	31	gl	
ROCKC33#5	1655 lb	10009 lb	10010 lb	0.01%	0.80% M	10	gl	
CEMENT	479 lb	2874 lb	2880 lb	0.21%				
FLYASH	85 lb	510 lb	525 lb	+ 2.94%				
WREDUCE1	16.92 oz	101.52 oz	102.00 oz	0.47%				
AIR1	5.75 oz #	34.50 oz	34.00 oz	-1.45%				
WATER	30.5 gl	130.3 gl	130.0 gl	-0.25%		130.0	gl	-2.00 gl

Num Batches: 1 Manual 17:54:51  
 lb Design W/C: 0.451 Water/Cement: 0.449 T Design 183.0 gl Actual 170.7 gl To Add: 12.3 gl  
 # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT



# PENNY'S

**CONCRETE, INC.**

23400 W. 82ND STREET  
 SHAWNEE MISSION, KANSAS 66227-2705  
 DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
 (800) 322-9710 (800) 524-6474



www.pennysconcrete.com  
 An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/24/2013	BLISS	0159	DOUG BERG	1088240

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH
JOB ADDRESS	THROUGH GATE FOLLOW DIRTROAD ON LEFT TAKE
6100 ROCK CHALK DR - ROCK CHALK	HAUL RD NORTHTO 3RD ENTRANCE EAST INTO
PARK - LAWRENCE, KS	PAVING



22,963

**NOTE:**  
 ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
 STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
115	TEC#	ROCKCHALKPAR		EXTFW	142	5
000003471						
8						

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
6.00	yd	40-A564	4000 PSI AE	31	31		
6.00	M3	HANDLE	PLANT HANDLING FEE	31	31		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
 TAX  
 TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ **X** \_\_\_\_\_  
 PRINTED NAME TITLE CUSTOMER SIGNATURE  
**NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT**

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANFAA	1360 lb	8423 lb	8440 lb	0.20%	3.22% A	32	gl	
ROCKC33#5	1650 lb	9979 lb	10040 lb	0.61%	0.80% M	10	gl	
CEMENT	564 lb	3384 lb	3390 lb	0.18%				
WREDUCE1	16.92 oz	101.52 oz	101.00 oz	-0.51%				
AIR1	5.50 oz #	33.00 oz	33.00 oz	0.00%				
WATER	30.5 gl	130.0 gl	130.0 gl	-0.02%		130.0	gl	-2.00 gl

Num Batches: 1 Manual 17:37:34  
 Design 183.0 gl Actual 171.1 gl To Add: 11.9 gl  
 Water/Cement: 0.451 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL  
 Water in Truck: 0.0 gl



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 09/24/2013	ACCOUNT BLISS	TRUCK 0108	DRIVER NAME CARL MULLER	TICKET # 1088134		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH THROUGH GATE FOLLOW DIRTROAD ON LEFT TAKE HAUL RD NORTH TO 3RD ENTRANCE EAST INTO PAVING				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
			34,353				
ORDER # 64	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION WALL	PREVIOUS TRUCK 140	SLUMP 5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
9.00	CYDS	40-A564F	4K AE FA	64	18		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal			

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ **X** \_\_\_\_\_  
PRINTED NAME TITLE CUSTOMER SIGNATURE  
**NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT**

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1354 lb	12447 lb	12450 lb	0.03%	2.14% A	31	gl	
ROCKC33#5	1655 lb	15014 lb	15020 lb	0.04%	0.80% M	14	gl	
CEMENT	479 lb	4311 lb	4335 lb	0.56%				
FLYASH	85 lb	765 lb	775 lb	1.31%				
WREDUCE1	16.92 oz	152.28 oz	152.00 oz	-0.18%				
AIR1	5.50 oz #	49.50 oz	50.00 oz	1.01%				
WATER	30.5 gl	211.0 gl	211.0 gl	0.02%		211.0	gl	-2.00 gl

Num Batches: 1 Manual 7:58:34  
 ual 34353 lb Design W/C: 0.451 Water/Cement: 0.448 T Design 274.5 gl Actual 258.5 gl To Add. 18.0 gl  
 id mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/24/2013	BLISS	0174	Shawn Cool	1088239

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH
JOB ADDRESS	THROUGH GATE FOLLOW DIRTROAD ON LEFT TAKE
6100 ROCK CHALK DR - ROCK CHALK	HAUL RD NORTH TO 3RD ENTRANCE EAST INTO
PARK - LAWRENCE, KS	PAVING

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
132	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	145	4

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	20	20		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim	
ROCKC33#5	1722 lb	17358 lb	17360 lb	0.01%	0.80% M	17	gl	5:15 pm	
SANDFAA	1409 lb	14574 lb	14670 lb	0.66%	3.44% A	58	gl		
CEMENT	479 lb	4790 lb	4800 lb	0.21%					
FLYASH	85 lb	850 lb	850 lb	0.00%					
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%					
WATER	33.9 gl	244.5 gl	244.0 gl	-0.19%		244.0	gl		
									-2.00 gl

Manual 16:36:14

Num Batches: 1

Design 339.0 gl Actual 318.9 gl To Add: 20.1 gl

Water/Cement: 0.501 T Design 339.0 gl Actual 318.9 gl To Add: 20.1 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

## CONCRETE, INC.


23400 W. 82ND STREET  
 SHAWNEE MISSION, KANSAS 66227-2705  
 DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
 (800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
 An Equal Opportunity Employer



PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/26/2013	BLISS	0139	Kevin Tolbert	1088422

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - THROUGH GATE FOLLOW DIRT ROAD ON LEFT TO TRACK HEAD WEST AROUND TRACK AND AROUND TO THENORTH ALL THE WAY TO PAVING
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***BLISS CR	

	38,326	<b>NOTE:</b> ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!
---	--------	--

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
45	TEC# 000003471 8	ROCKCHALKPAR		EXTFW	200	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	68	30		
10.00	M3	HANDLE	PLANT HANDLING FEE	50	30		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

5.44 per

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD	<b>SUBTOTAL</b> <b>TAX</b> <b>TOTAL</b>
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal				

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

X  
 \_\_\_\_\_  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13936 lb	13950 lb	0.10%	2.47% A	40	gl	
ROCKC33#5	1650 lb	16632 lb	16640 lb	0.05%	0.80% M	16	gl	
CEMENT	564 lb	5640 lb	5645 lb	0.09%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	3.50 oz	35.00 oz	35.00 oz	0.00%				
WATER	30.5 gl	246.9 gl	249.0 gl	0.05%		249.0	gl	gl

Num Batches: 1

Manual 16:56:34

id 38326 lb Design W/C: 0.451 Water/Cement: 0.451 A Design 305.0 gl Actual 305.2 gl To Add: 0.0 gl

mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: 0.0 gl / CYC



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications



MoDOT  
Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/30/2013	BLISS	0157	JOHN BOLEY	1088542

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH THROUGH GATE - NORTH ONHAUL ROAD TO WEST ENTRANCE OF NORTH REC CENTER PROJECT
<b>JOB ADDRESS</b> ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS	



39,548

**NOTE:**

ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
2		ROCKCHALKREC		INT-FW	154	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-564	4000 PSI NO AE	700	700		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

X

CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME

TITLE

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
CEMENT	564 lb	5640 lb	5650 lb	0.18%				
ROCKC33#5	1717 lb	17239 lb	17240 lb	0.01%	0.40% M	8	gl	
SANDFAA	1405 lb	14565 lb	14570 lb	0.04%	3.66% A	62	gl	
WATER	33.9 gl	249.1 gl	249.0 gl	-0.04%		249.0	gl	-2.00 gl
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				

Num Batches: 1  
Manual 8:45:05  
39548 lb Design W/C: 0.502 Water/Cement: 0.501 T Design 339.0 gl Actual 318.9 gl To Add: 20.1 gl  
5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	09/30/2013	BLISS	0195	Marty Trumble	1088586
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - LEFT THROUGH GATE - NORTH ON HAUL RD - PUMP SHOULD BEON YOUR LEFT BY THE STADIUM SEATING		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***BLISS CR					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
65	TEC# 000003471 8	ROCKCHALKPAR		EXTFW	119	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	75	40		
10.00	M3	HANDLE	PLANT HANDLING FEE	75	40		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

GRAND TOTAL

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE X \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim	
SANDFAA	1360 lb	14049 lb	14060 lb	0.08%	3.30% A	54	gl	1.15 pm	
ROCKC33#5	1650 lb	16566 lb	16570 lb	0.02%	0.40% M	8	gl		
CEMENT	564 lb	5640 lb	5650 lb	0.18%					
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%					
AIR1	4.50 oz #	45.00 oz	45.00 oz	0.00%					
WATER	30.5 gl	223.3 gl	224.0 gl	0.32%		224.0	gl		
									-2.00 gl

Num Batches: 1

Design 305.0 gl Actual 285.8 gl To Add: 19.3 gl

Water/Cement 0.451 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT

Manual 12:26:34



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	10/01/2013	BLISS	0123	TIMOTHY BELTON	1088745

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - LEFT THROUGH GATE - NORTH ON HAUL RD - PUMP SHOULD BE ON YOUR LEFT BY THE STADIUM SEATING
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***BLISS CR	



38,233

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
83	TEC# 000003471 8	ROCKCHALKPAR		EXTFW	171	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	75	50		
10.00	M3	HANDLE	PLANT HANDLING FEE	75	50		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

5:05 PM

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

GRAND TOTAL

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_  
 X \_\_\_\_\_  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13940 lb	13970 lb	0.22%	2.50% M	41	gl	
ROCKC33#5	1650 lb	16566 lb	16640 lb	0.45%	0.40% M	8	gl	
CEMENT	564 lb	5640 lb	5640 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	5.00 oz #	50.00 oz	50.00 oz	0.00%				
WATER	30.5 gl	236.3 gl	236.0 gl	-0.15%		236.0	gl	-2.00 gl

Num Batches: 1  
 Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 284.8 gl To Add: 20.2 gl  
 Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC





# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute  
Certifications



Certifications

KANSAS  
Department of Transportation  
Certifications

PLANT 01	DATE 10/03/2013	ACCOUNT BLISS	TRUCK 0114	DRIVER NAME BRIAN LINDELOF	TICKET # 1088926
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - THROUGH GATE - NORTH ON HAUL ROAD - PUMP WILL BE ON YOUR LEFT		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS ***BLISS CR					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 14	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION	PREVIOUS TRUCK 174	SLUMP 5
---------------	-------------------------------	------------------------------	------	-------------	-----------------------	------------

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	75	20		
10.00	M3	HANDLE	PLANT HANDLING FEE	75	20		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal			

SUBTOTAL  
TAX  
TOTAL

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1380 lb	13913 lb	14070 lb	1.13%	2.30% M	38	gl	
ROCKC33#5	1650 lb	16533 lb	16540 lb	0.04%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5650 lb	0.18%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	5.50 oz #	55.00 oz	55.00 oz	0.00%				
WATER	30.5 gl	243.6 gl	243.0 gl	-0.23%		243.0	gl	-2.00 gl

Manual 12:22:59

Num Batches: 1

Design 305.0 gl Actual 284.9 gl To Add: 20.1 gl

Water/Cement: 0.451 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl /

Water in Truck: 0.0 gl

CYT Note: Manual feed occurred



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute  
Certifications



Certifications


KANSAS

DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	10/04/2013	BLISS	0139	Kevin Tolbert	1089030

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - THROUGH GATE - NORTH ON HAUL ROAD - BACK DOWN TO PAVER
<b>JOB ADDRESS</b> ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS	

	38,228	<b>NOTE:</b> ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!
---	--------	---

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
100		ROCKCHALKREC		EXTFW	94	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	50	50		
10.00	M3	HANDLE	PLANT HANDLING FEE	50	50		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_  
PRINTED NAME

\_\_\_\_\_  
TITLE

X  
CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	14049 lb	14130 lb	0.58%	3.30% M	54	gl	
ROCKC33#5	1650 lb	16517 lb	16520 lb	0.02%	0.10% M	2	gl	
CEMENT	564 lb	5640 lb	5645 lb	0.09%				
WREDUCE1	16.92 oz	169.20 oz	168.00 oz	-0.71%				
AIR1	5.50 oz #	55.00 oz	55.00 oz	0.00%				
WATER	30.5 gl	229.2 gl	230.0 gl	0.33%		230.0	gl	-2.00 gl

ual Num Batches: 1 Manual 17:04:49  
 vd 38228 lb Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 286.1 gl To Add: 18.9 gl  
 mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	10/04/2013	BLISS	0139	Kevin Tolbert	1088992

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6.5'' after super *** 6TH ST. WEST - GEORGE
JOB ADDRESS	WILLIAM WAY NORTH THROUGH GATE FOLLOW DIRT
6100 ROCK CHALK DR - ROCK CHALK	ROAD ON LEFT TAKE HAUL RD NORTH TO 3RD
PARK - LAWRENCE, KS	ENTRANCE EAST INTO PAVING

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
9		ROCKCHALKREC			194	3

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-590R	4K NO-AE.44 CA5	138	100		
10.00	oz	SUPER1	WR GRACE ADVA 140M - S	1	3540		
10.00	M3	HANDLE	PLANT HANDLING FEE	138	100		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 PRINTED NAME TITLE  
 \_\_\_\_\_  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wet	Trim
SANDFAA	1404 lb	14489 lb	14520 lb	0.21%	3.20% M	54	gl	
ROCKCA5	1716 lb	17211 lb	17290 lb	0.46%	0.30% M	6	gl	
CEMENT	590 lb	5900 lb	5960 lb	+ 1.02%				
WREDUCE1	29.50 oz	295.00 oz	296.00 oz	0.34%				
WATER	31.9 gl	239.0 gl	238.0 gl	-0.42%		238.0	gl	-2.00 gl
SUPER1	35.40 oz	354.00 oz	355.00 oz	0.28%				

Num Batches: 1  
 Manual 11:08:19  
 ual 39797 lb Design W/C: 0.451 Water/Cement: 0.447 T Design 319.0 gl Actual 298.1 gl To Add: 20.9 gl  
 id 3.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYE  
 mp:



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 10/04/2013	ACCOUNT BLISS	TRUCK 0133	DRIVER NAME LANCE DAY	TICKET # 1089021		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH THROUGH GATE FOLLOW DIRTROAD ON LEFT TAKE HAUL RD NORTH TO PUMP BY SOFTBALL FIELD				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
			38,244				
ORDER # 96	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION WALL	PREVIOUS TRUCK 136	SLUMP 5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-A564F	4K AE FA	70	60		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE X \_\_\_\_\_

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1354 lb	13987 lb	13990 lb	0.02%	3.30% M	54	gl	
ROCKC33#5	1655 lb	16567 lb	16670 lb	0.62%	0.10% M	2	gl	
CEMENT	479 lb	4790 lb	4795 lb	0.10%				
FLYASH	85 lb	850 lb	855 lb	0.59%				
WREDUCE1	16.92 oz	169.20 oz	168.00 oz	-0.71%				
AIR1	6.00 oz #	60.00 oz	60.00 oz	0.00%				
WATER	30.5 gl	229.5 gl	230.0 gl	0.23%		230.0	gl	-2.00 gl

Manual 14:17:23  
 Num Batches: 1  
 Design 305.0 gl Actual 285.6 gl To Add: 19.4 gl  
 id 38244 lb Design W/C: 0.451 Water/Cement: 0.451 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC  
 mp: 5.00 in # Water in Truck: 0.0 gl



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	10/07/2013	BLISS	0174	Shawn Cool	1089042

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH
JOB ADDRESS	
6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



38,208

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
52	TEC# 000003471 8	ROCKCHALKPAR		EXTFW	195	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	75	50		
10.00	M3	HANDLE	PLANT HANDLING FEE	75	50		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_  
PRINTED NAME TITLE

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	14049 lb	14060 lb	0.08%	3.30% M	54	gl	
ROCKC33#5	1650 lb	16632 lb	16680 lb	0.29%	0.80% M	16	gl	
CEMENT	564 lb	5640 lb	5660 lb	0.35%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	5.00 oz #	50.00 oz	50.00 oz	0.00%				
WATER	30.5 gl	215.4 gl	215.0 gl	-0.19%		215.0	gl	-2.00 gl

Num Batches: 1 Manual 9:54:57  
 ual 38208 lb Design W/C: 0.451 Water/Cement: 0.450 T Design 305.0 gl Actual 284.7 gl To Add: 20.3 gl  
 id 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL Note: Manual feed occurred  
 mp:



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	10/08/2013	BLISS	0139	Kevin Tolbert	1089081

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



19,116

**NOTE:**

ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
27	TEC# 000003471 8	ROCKCHALKPAR			114	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
5.00	yd	40-A564	4000 PSI AE	75	75		
5.00	M3	HANDLE	PLANT HANDLING FEE	75	75		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

GRAND TOTAL

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_  
X \_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	6977 lb	7030 lb	0.76%	2.60% M	21	gl	
ROCKC33#5	1650 lb	8316 lb	8320 lb	0.05%	0.80% M	8	gl	
CEMENT	564 lb	2820 lb	2825 lb	0.18%				
WREDUCE1	16.92 oz	84.60 oz	84.00 oz	-0.71%				
AIR1	5.00 oz #	25.00 oz	25.00 oz	0.00%				
WATER	30.5 gl	113.4 gl	112.0 gl	-1.24%		112.0	gl	-2.00 gl

Num Batches: 1  
Manual 16:44:20  
Design 152.5 gl Actual 141.3 gl To Add: 11.2 gl  
Water/Cement: 0.451 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC  
Water in Truck: 0.0 gl



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	10/08/2013	BLISS	0114	BRIAN LINDELOF	1089085

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH
JOB ADDRESS	
6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



30,558

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
70	TEC# 000003471 8	ROCKCHALKPAR		WALL	159	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
8.00	CYDS	40-A564F	4K AE FA	38	38		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. **GRAND TOTAL**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_  
PRINTED NAME TITLE

**X** \_\_\_\_\_  
CUSTOMER SIGNATURE  
**NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT**

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1354 lb	11114 lb	11120 lb	0.06%	2.60% M	34	gl	
ROCKC33#5	1655 lb	13346 lb	13400 lb	0.41%	0.80% M	13	gl	
CEMENT	479 lb	3832 lb	3845 lb	0.34%				
FLYASH	85 lb	680 lb	680 lb	0.00%				
WREDUCE1	16.92 oz	135.36 oz	136.00 oz	0.47%				
AIR1	5.25 oz #	42.00 oz	42.00 oz	0.00%				
WATER	30.5 gl	181.6 gl	180.0 gl	-0.86%		180.0	gl	-2.00 gl

Manual 18:09:19  
 ual 30558 lb Design W/C: 0.451 Water/Cement: 0.450 T Design 244.0 gl Actual 226.5 gl To Add: 17.5 gl  
 id mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	10/09/2013	BLISS	0159	DOUG BERG	1089089		
CUSTOMER NAME			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS				
BLISS SPORTS LLC			6TH ST WEST - GEORGE WILLIAMS WAY NORTH -				
JOB ADDRESS			THROUGH GATEHEAD NORTON HAUL ROAD - ENTER				
ROCK CHALK PARK - REC. & WELNESS			REC CENTERPROJECT FROM WEST SIDE				
CENTER - LAWRENCE, KS							
			NOTE:				
39,660			ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,				
			STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
76		ROCKCHALKREC		FOOTING		5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	10	10		
1.00	ea	FUEINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds \_\_\_ gal \_\_\_ yds \_\_\_ gal \_\_\_ yds \_\_\_ gal \_\_\_ yds \_\_\_ gal \_\_\_

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

**X**

\_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17392 lb	17400 lb	0.04%	1.00% M	21	gl	
SANDFAA	1409 lb	14456 lb	14470 lb	0.09%	2.60% M	44	gl	
CEMENT	479 lb	4790 lb	4800 lb	0.21%				
FLYASH	85 lb	850 lb	860 lb	1.18%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	254.5 gl	254.0 gl	-0.18%		254.0	gl	-2.00 gl

Num Batches: 1

Design 339.0 gl Actual 318.6 gl To Add: 20.4 gl

39660 lb Design W/C: 0.502 Water/Cement: 0.500 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC

5.00 in # Water in Truck: 0.0 gl





# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	10/11/2013	BLISS	0195	Marty Trumble	1089196

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH
JOB ADDRESS	
6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



38,202

NOTE:  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
19	TEC# 000003471 8	ROCKCHALKPAR		EXTFW	139	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	120	120		
10.00	M3	HANDLE	PLANT HANDLING FEE	120	120		
1.00	ea	FUELINV	FUEL SURCHARGE -- PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13884 lb	13920 lb	0.26%	2.09% A	34	gl	
ROCKC33#5	1650 lb	16533 lb	16550 lb	0.10%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5665 lb	0.44%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	5.00 oz #	50.00 oz	50.00 oz	0.00%				
WATER	30.5 gl	247.0 gl	246.0 gl	-0.42%		246.0	gl	-2.00 gl

Num Batches: 1

Design 305.0 gl Actual 284.1 gl To Add: 20.9 gl

Water/Cement: 0.449 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC

Water in Truck: 0.0 gl



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	11/15/2013	BLISS	0200	DUANE BENTLEY	1090650

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH
JOB ADDRESS	-WEST ON JOB SITE- NORTH ON CONCRETE HAUL RD TO PUMP
ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS - LITHKO	



39,613

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
3		ROCKCHALKREC		SOG	139	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-564	4000 PSI NO AE	490	300		
10.00	oz	DARASET	DARASET 1.0% NON-CHLOF	1	27072		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
CEMENT	564 lb	5640 lb	5655 lb	0.27%				
ROCKC33#5	1717 lb	17342 lb	17350 lb	0.05%	1.00% M	21	gl	
SANDFAA	1405 lb	14528 lb	14530 lb	0.02%	3.40% M	57	gl	
WATER	33.9 gl	241.2 gl	241.0 gl	-0.08%		241.0	gl	-2.00 gl
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
DARASET	90.24 oz	902.40 oz	896.00 oz	-0.71%				

Num Batches: 1  
Manual 7:46:22  
39613 lb Design W/C: 0.502 Water/Cement: 0.500 T Design 339.0 gl Actual 318.8 gl To Add: 20.2 gl  
5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	11/19/2013	BLISS	0161	TRAVIS WORRELL	1090858

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	7 INCH AFTER SUPER ADDED ON SITE****6TH ST.
JOB ADDRESS	WEST - GEORGE WILLIAM WAY NORTH - WEST
ROCK CHALK PARK - REC. & WELNESS	THROUGH GATE- NORTH ON CONCRETE HAUL RD TO
CENTER - LAWRENCE, KS - LITHKO	NORTH PARKING LOT

NOTE:
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
126		ROCKCHALKREC			194	3

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-590R	4K NO-AE.44 CA5	100	20		
10.00	oz	SUPER1	WR GRACE ADVA 140M - S	1	708		
10.00	M3	HANDLE	PLANT HANDLING FEE	100	20		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 PRINTED NAME TITLE  
 X  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1404 lb	14441 lb	14440 lb	0.00%	2.85% A	48	gl	
ROCKCA5	1716 lb	17194 lb	17260 lb	0.38%	0.20% M	4	gl	
CEMENT	590 lb	5900 lb	5910 lb	0.17%				
WREDUCE1	29.50 oz	295.00 oz	296.00 oz	0.34%				
WATER	31.9 gl	246.9 gl	248.0 gl	0.45%		248.0	gl	-2.00 gl
SUPER1	35.40 oz	354.00 oz	354.00 oz	0.00%				

Num Batches: 1  
 Manual 15:40:22  
 ual 39720 lb Design W/C: 0.451 Water/Cement: 0.450 T Design 319.0 gl Actual 300.1 gl To Add: 18.9 gl  
 id 3.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL  
 mp:



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	11/20/2013	BLISS	0114	BRIAN LINDELOF	1090905

**CUSTOMER NAME**  
BLISS SPORTS LLC

**JOB ADDRESS**  
ROCK CHALK PARK - REC. & WELNESS  
CENTER - LAWRENCE, KS - LITHKO

**ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS**  
7 INCH AFTER SUPER ADDED ON SITE\*\*\*\*6TH ST.  
WEST - GEORGE WILLIAM WAY NORTH - WEST  
THROUGH GATE- NORTH ON CONCRETE HAUL RD TO  
NORTH PARKING LOT



35,743

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
73		ROCKCHALKREC				3

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
9.00	CYDS	40-590R	4K NO-AE.44 CA5	9	9		
9.00	oz	SUPER1	WR GRACE ADVA 140M - S	1	318.6		
9.00	oz	DARASET	DARASET .50% NON-CHLOF	1	424.8		
9.00	M3	HANDLE	PLANT HANDLING FEE	9	9		
9.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

**X**  
CUSTOMER SIGNATURE

PRINTED NAME

TITLE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1404 lb	13116 lb	13140 lb	0.18%	3.80% M	58	gl	
ROCKCA5	1716 lb	15475 lb	15480 lb	0.03%	0.20% M	4	gl	
CEMENT	590 lb	5310 lb	5325 lb	0.28%				
WREDUCE1	29.50 oz	265.50 oz	264.00 oz	-0.56%				
WATER	31.9 gl	207.9 gl	208.0 gl	0.07%		208.0	gl	-2.00 gl
SUPER1	35.40 oz	318.60 oz	317.00 oz	-0.50%				
DARASET	47.20 oz	424.80 oz	416.00 oz	-2.07%				

ual Num Batches: 1 Manual 14:00:04  
 id 35743 lb Design W/C: 0.451 Water/Cement: 0.450 T Design 287.1 gl Actual 269.3 gl To Add: 17.8 gl  
 mp: 3.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 11/21/2013	ACCOUNT BLISS	TRUCK 0174	DRIVER NAME Shawn Cool	TICKET # 1090929		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - NORTH ON CONCRETE HAUL RD - WESTAT SOFTBALL FIELD TO CRANE				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 23	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION FOOTING	PREVIOUS TRUCK 159	SLUMP 3	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	60	30		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal			

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

GRAND TOTAL

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17323 lb	17570 lb	+ 1.42%	0.60% M	13	gl	
SANDFAA	1409 lb	14625 lb	14620 lb	-0.04%	3.80% M	64	gl	
CEMENT	479 lb	4790 lb	4805 lb	0.31%				
FLYASH	85 lb	850 lb	905 lb	+ 6.47%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	242.5 gl	241.0 gl	-0.60%		241.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.502 Water/Cement: 0.495 T Design 339.0 gl Actual 317.7 gl To Add: 21.3 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYE



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	12/02/2013	BLISS	0135	KENNETH NICHOLS	1091095		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL ROAD NORTH - WEST TO PUMP				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
31	TEC# 000003471 8	ROCKCHALKPAR		SOD	174	5	
38,280							
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	20	20		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X \_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13893 lb	13950 lb	0.41%	2.16% A	35	gl	
ROCKC33#5	1650 lb	16550 lb	16640 lb	0.55%	0.30% M	6	gl	
CEMENT	564 lb	5640 lb	5640 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	4.50 oz #	45.00 oz	45.00 oz	0.00%				
WATER	30.5 gl	243.9 gl	244.0 gl	0.03%		244.0	gl	-2.00 gl

Num Batches: 1 Manual 7:57:39

ual 38280 lb Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 285.3 gl To Add: 19.7 gl

mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYE



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/02/2013	BLISS	0195	Marty Trumble	1091102
CUSTOMER NAME			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
BLISS SPORTS LLC			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH -		
JOB ADDRESS			WEST ONTO JOBSITE - HAUL ROAD NORTH - WEST		
6100 ROCK CHALK DR - ROCK CHALK			TO PUMP		
PARK - LAWRENCE, KS					
			NOTE:		
38,271			ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,		
			STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
60	TEC# 000003471 8	ROCKCHALKPAR			146	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	30	30		
10.00	/y	WINTER	WINTER SERV	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

**X** \_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13921 lb	13940 lb	0.14%	2.36% A	38	gl	
ROCKC33#5	1650 lb	16550 lb	16590 lb	0.24%	0.30% M	6	gl	
CEMENT	564 lb	5640 lb	5725 lb	+ 1.51%				
WREDUCE1	16.92 oz	169.20 oz	168.00 oz	-0.71%				
AIR1	4.50 oz #	45.00 oz	44.00 oz	-2.22%				
WATER	30.5 gl	240.6 gl	240.0 gl	-0.27%		240.0	gl	-2.00 gl

Num Batches: 1 Manual 11:21:41

Design W/C: 0.451 Water/Cement: 0.445 T Design 305.0 gl Actual 284.4 gl To Add: 20.6 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/03/2013	BLISS	0152	BRYAN REEVES	1091134

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAMS WAY NORTH -
JOB ADDRESS	WEST ONTO JOBSITE - HAUL RD NORTH TO PUMP
6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



38,141

### NOTE:

ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
12	TEC# 000003471 8	ROCKCHALKPAR		SOD	139	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	120	100		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13987 lb	13990 lb	0.02%	2.85% A	46	gl	
ROCKC33#5	1650 lb	16533 lb	16540 lb	0.04%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5645 lb	0.09%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
AIR1	4.50 oz #	45.00 oz	45.00 oz	0.00%				
WATER	30.5 gl	234.6 gl	234.0 gl	-0.27%		234.0	gl	-2.00 gl

Num Batches: 1

Manual 12:04:19

Design 305.0 gl Actual 284.4 gl To Add: 20.6 gl

Design W/C: 0.451 Water/Cement: 0.451 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC

Water in Truck: 0.0 gl





# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/04/2013	BLISS	0157	JOHN BOLEY	1091181

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAM WAY NORTH -
JOB ADDRESS	WEST THROUGH GATE - NORTH ON CONCRETE HAUL
ROCK CHALK PARK - REC. & WELNESS	RD TO NORTHPARKING LOT
CENTER - LAWRENCE, KS - LITHKO	



39,834

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
3		ROCKCHALKREC		TILTUP	184	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-540	4000 PSI NO AE	290	250		
10.00	oz	DARASET	DARASET 2 % NON CHLORI	1	43200		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 X  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1428 lb	14770 lb	14770 lb	0.00%	3.43% A	59	gl	
ROCKC33#5	1745 lb	17485 lb	17530 lb	0.26%	0.20% M	4	gl	
CEMENT	540 lb	5400 lb	5405 lb	0.09%				
WATER	32.4 gl	241.1 gl	241.0 gl	-0.05%		241.0	gl	-2.00 gl
WREDUCE1	16.20 oz	162.00 oz	161.00 oz	-0.62%				
DARASET	172.80 oz	1728.00 oz	1728.00 oz	0.00%				

Num Batches: 1 Manual 11:38:23  
 ual 39834 lb Design W/C: 0.501 Water/Cement: 0.500 T Design 324.0 gl Actual 303.9 gl To Add: 20.1 gl  
 id mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications




Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/04/2013	BLISS	0159	DOUG BERG	1091194

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> ** 7" AFTER SUPER ADDED ON SITE**6TH ST. WEST - GEORGE WILLIAMWAY NORTH - WEST THROUGH GATE -NORTH ON CONCRETE HAUL RD TO NORTH PARKING LOT
<b>JOB ADDRESS</b> ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS - LITHKO	

	39,786	<b>NOTE:</b> ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!
---	--------	---

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
5		ROCKCHALKREC			160	3

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-590R	4K NO-AE.44 CA5	90	20		
10.00	oz	SUPER1	WR GRACE ADVA 140M - S	1	708		
10.00	oz	DARASET	DARASET 1.50% NON-CHLC	1	2832		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

**SUBTOTAL**  
**TAX**  
**TOTAL**  
**GRAND TOTAL**

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_  
PRINTED NAME TITLE  
X \_\_\_\_\_  
CUSTOMER SIGNATURE  
**NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT**

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1404 lb	14520 lb	14520 lb	0.00%	3.42% A	58	gl	
ROCKCA5	1716 lb	17194 lb	17240 lb	0.27%	0.20% M	4	gl	
CEMENT	590 lb	5900 lb	5920 lb	0.34%				
WREDUCE1	29.50 oz	295.00 oz	295.00 oz	0.00%				
WATER	31.9 gl	237.4 gl	237.0 gl	-0.16%		237.0	gl	-2.00 gl
SUPER1	35.40 oz	354.00 oz	353.00 oz	-0.28%				
DARASET	141.60 oz	1416.00 oz	1408.00 oz	-0.56%				

ual Num Batches: 1 Manual 14:01:12  
id 39786 lb Design W/C: 0.451 Water/Cement: 0.450 T Design 319.0 gl Actual 298.6 gl To Add: 20.4 gl  
mp: 3.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	12/05/2013	BLISS	0139	Kevin Tolbert	1091215		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH - WEST THROUGH PARTIAL PARKING LOT TO SOUTH END OF SOCCER FIELD				
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK		
42	TEC#	ROCKCHALKPAR		FOOTING			
000003471							
8							
SLUMP							
5							
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	10	10		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD	
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	SUBTOTAL
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal				TAX
				TOTAL

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17254 lb	17270 lb	0.09%	0.20% M	4	gl	
SANDFAA	1409 lb	14507 lb	14510 lb	0.02%	2.96% A	50	gl	
CEMENT	479 lb	4790 lb	4790 lb	0.00%				
FLYASH	85 lb	850 lb	855 lb	0.59%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
WATER	33.9 gl	264.9 gl	265.0 gl	0.03%		265.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.502 Water/Cement: 0.501 T Design 339.0 gl Actual 319.1 gl To Add: 19.9 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY

Manual 14:58:30



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/12/2013	BLISS	0160	Joseph Tate	1091261

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAMS WAY NORTH -
JOB ADDRESS	WEST ONTO JOBSITE - HAUL RD NORTH - WEST AT
6100 ROCK CHALK DR - ROCK CHALK	END TO NORTH SIDE OF SOFTBALL FIELD
PARK - LAWRENCE, KS	



38,159

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
72	TEC#	ROCKCHALKPAR		WALL	174	5
	000003471					
	8					

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	25	20		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	
		BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.  
MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13944 lb	13940 lb	-0.03%	2.53% A	41	gl	
ROCKC33#5	1650 lb	16550 lb	16580 lb	0.18%	0.30% M	6	gl	
CEMENT	564 lb	5640 lb	5640 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
AIR1	4.00 oz #	40.00 oz	39.00 oz	-2.50%				
WATER	30.5 gl	237.9 gl	238.0 gl	0.05%		238.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 285.1 gl To Add: 19.9 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY

Manual 8:33:42



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/13/2013	BLISS	0174	Shawn Cool	1091287

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> ** 7" AFTER SUPER **6TH ST. WEST- GEORGE WILLIAM WAY NORTH - WEST THROUGH GATE - NORTH ON CONCRETE HAUL RD TO NORTH PARKING LOT- FOLLOW DIRT ROAD IN NE CORNERDOWN AND AROUND NORTH SIDE TO P
<b>JOB ADDRESS</b> ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS - LITHKO	



39,734

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
3		ROCKCHALKREC		WALL	184	3

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-590R	4K NO-AE.44 CA5	90	20		
10.00	oz	SUPER1	WR GRACE ADVA 140M - S	1	708		
10.00	oz	DARASET	DARASET 1.0% NON-CHLOF	1	1888		
10.00	M3	HANDLE	PLANT HANDLING FEE	90	20		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

**SUBTOTAL**  
**TAX**  
**TOTAL**  
**GRAND TOTAL**

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 PRINTED NAME TITLE  
 \_\_\_\_\_  
 X  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1404 lb	14421 lb	14430 lb	0.06%	2.71% A	46	gl	
ROCKCA5	1716 lb	17194 lb	17210 lb	0.09%	0.20% M	4	gl	
CEMENT	590 lb	5900 lb	5925 lb	0.42%				
WREDUCE1	29.50 oz	295.00 oz	295.00 oz	0.00%				
WATER	31.9 gl	249.3 gl	248.0 gl	-0.50%		248.0	gl	-2.00 gl
SUPER1	35.40 oz	354.00 oz	353.00 oz	-0.28%				
DARASET	94.40 oz	944.00 oz	944.00 oz	0.00%				

ual Num Batches: 1 Manual 4.55.32  
 id 39734 lb Design W/C: 0.451 Water/Cement: 0.449 T Design 319.0 gl Actual 297.8 gl To Add: 21.2 gl  
 mp: 3.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/13/2013	BLISS	0174	Shawn Cool	1091311

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAMS WAY NORTH
JOB ADDRESS	'TILL IT TURNS WEST - HAUL RD NORTH TO PUMP
6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



39,719

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
11	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	186	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	150	110		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17237 lb	17260 lb	0.13%	0.10% M	2	gl	
SANDFAA	1409 lb	14547 lb	14620 lb	0.50%	3.24% A	55	gl	
CEMENT	479 lb	4790 lb	4800 lb	0.21%				
FLYASH	85 lb	850 lb	850 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	262.2 gl	261.0 gl	-0.46%		261.0	gl	-2.00 gl

Num Batches: 1 Manual 11:44:26

Design W/C: 0.502 Water/Cement: 0.501 T Design 339.0 gl Actual 318.1 gl To Add: 20.9 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/16/2013	BLISS	0114	BRIAN LINDELOF	1091324

CUSTOMER NAME	ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS
BLISS SPORTS LLC	6TH ST. WEST - GEORGE WILLIAMS WAY NORTH -
JOB ADDRESS	WEST ONTO JOBSITE - HAUL RD NORTH - WEST AT
6100 ROCK CHALK DR - ROCK CHALK	END TO NORTH SIDE OF SOFTBALL FIELD
PARK - LAWRENCE, KS	



38,171

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
32	TEC# 000003471 8	ROCKCHALKPAR		ESTEPS	139	3

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	25	20		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

GRAND TOTAL

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANFAA	1360 lb	14004 lb	14010 lb	0.05%	2.97% A	48	gl	
ROCKC33#5	1650 lb	16517 lb	16540 lb	0.14%	0.10% M	2	gl	
CEMENT	564 lb	5640 lb	5655 lb	0.27%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	4.00 oz #	40.00 oz	40.00 oz	0.00%				
WATER	30.5 gl	234.7 gl	234.0 gl	-0.28%		234.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.451 Water/Cement: 0.450 T Design 305.0 gl Actual 284.4 gl To Add: 20.6 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY

Manual 9:24:03



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com

An Equal Opportunity Employer



American Concrete Institute®  
Certifications




Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	12/16/2013	BLISS	0139	Kevin Tolbert	1091341

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH - WEST AT END TO NORTH SIDE OF SOFTBALL FIELD
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	

	39,659	<b>NOTE:</b> ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!
---	--------	--

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
34	TEC# 000003471 8	ROCKCHALKPAR		FOOTING		5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	40	10		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD	SUBTOTAL
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal				TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

**X**  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17272 lb	17290 lb	0.11%	0.30% M	6	gl	
SANDFAA	1409 lb	14486 lb	14490 lb	0.03%	2.81% A	47	gl	
CEMENT	479 lb	4790 lb	4810 lb	0.42%				
FLYASH	85 lb	850 lb	855 lb	0.59%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
WATER	33.9 gl	265.3 gl	264.0 gl	-0.50%		264.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.502 Water/Cement: 0.499 T Design 339.0 gl Actual 317.7 gl To Add: 21.3 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY





# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 12/18/2013	ACCOUNT BLISS	TRUCK 0118	DRIVER NAME DAVID CAZIER	TICKET # 1091416		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - WEST THROUGH GATE - NORTH ON CONCRETE HAUL RD TO NORTH PARKING LOT				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS - LITHKO			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
39,793							
ORDER # 2	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION WALL	PREVIOUS TRUCK 129	SLUMP 5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-540	4000 PSI NO AE	270	210		
10.00	oz	DARASET	DARASET .50% NON-CHLOF	1	9072		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
					SUBTOTAL		
					TAX		
					TOTAL		
					GRAND TOTAL		

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wet	Trim
SANDFAA	1428 lb	14710 lb	14780 lb	0.47%	3.01% A	52	gl	
ROCKC33#5	1745 lb	17467 lb	17480 lb	0.07%	0.10% M	2	gl	
CEMENT	540 lb	5400 lb	5410 lb	0.19%				
WATER	32.4 gl	250.4 gl	250.0 gl	-0.14%		250.0	gl	-2.00 gl
WREDUCE1	16.20 oz	162.00 oz	162.00 oz	0.00%				
DARASET	43.20 oz	432.00 oz	432.00 oz	0.00%				

Num Batches: 1

Design W/C: 0.501 Water/Cement: 0.500 T Design 324.0 gl Actual 303.9 gl To Add: 20.1 gl

5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 12/20/2013	ACCOUNT BLISS	TRUCK 0159	DRIVER NAME DOUG BERG	TICKET # 1091546		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - WEST THROUGH GATE - NORTH ON CONCRETE HAUL RD TO NORTHPARKING LOT				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS - LITHKO			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 10	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION TILTUP	PREVIOUS TRUCK 184		
SLUMP 5							
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-540	4000 PSI NO AE	230	200		
10.00	oz	DARASET	DARASET 1.0% NON-CHLOF	1	17280		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1428 lb	14781 lb	14800 lb	0.13%	3.51% A	60	gl	
ROCKC33#5	1745 lb	17467 lb	17480 lb	0.07%	0.10% M	2	gl	
CEMENT	540 lb	5400 lb	5420 lb	0.37%				
WATER	32.4 gl	241.8 gl	243.0 gl	0.49%		243.0	gl	-2.00 gl
WREDUCE1	16.20 oz	162.00 oz	162.00 oz	0.00%				
DARASET	86.40 oz	864.00 oz	848.00 oz	-1.85%				

Num Batches: 1 Manual 9:45:07

Design W/C: 0.501 Water/Cement: 0.499 T Design 324.0 gl Actual 305.3 gl To Add: 18.7 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl /

CYL Note: Manual feed occurred



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 01/08/2014	ACCOUNT BLISS	TRUCK 0194	DRIVER NAME Wayne Grammer	TICKET # 1091633		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH/WEST TO SOUTH END OF SOCCER FEILD WHELL BARROW INSIDE				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
15,879							
ORDER # 15	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION INT-FW	PREVIOUS TRUCK 5		
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
4.00	yd	40-564	4000 PSI NO AE	4	4		
4.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

SUBTOTAL  
TAX  
TOTAL

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature; ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**GRAND TOTAL**  
MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
CEMENT	564 lb	2256 lb	2275 lb	0.84%				
ROCKC33#5	1717 lb	6875 lb	6890 lb	0.22%	0.10% M	1	gl	
SANDFAA	1405 lb	5772 lb	5800 lb	0.48%	2.71% A	18	gl	
WATER	33.9 gl	108.5 gl	109.0 gl	0.42%		109.0	gl	-2.00 gl
WREDUCE1	16.92 oz	67.68 oz	68.00 oz	0.47%				

Num Batches: 1

Manual 10:33:30

Design 135.6 gl Actual 128.1 gl To Add: 7.5 gl

Water/Cement: 0.497 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT

Design W/C: 0.502 Water in Truck: 0.0 gl



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute  
Certifications




Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	01/03/2014	BLISS	0194	Wayne Grammer	1091625

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH TO PUMP
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	

	38,138	<b>NOTE:</b> ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!
---	--------	---

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
15	TEC# 000003471 8	ROCKCHALKPAR		WALL	159	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	130	100		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

**SUBTOTAL**  
**TAX**  
**TOTAL**

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**GRAND TOTAL**

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

**X** \_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13954 lb	13960 lb	0.04%	2.60% A	42	gl	
ROCKC33#5	1650 lb	16517 lb	16520 lb	0.02%	0.10% M	2	gl	
CEMENT	564 lb	5640 lb	5650 lb	0.18%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	4.00 oz #	40.00 oz	40.00 oz	0.00%				
WATER	30.5 gl	240.6 gl	239.0 gl	-0.66%		239.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 283.4 gl To Add: 21.6 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 01/15/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1091703
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH/WEST TO SOUTH END OF SOCCER FEILD WHELL BARROW INSIDE		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 20	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB# 38,168	APPLICATION	PREVIOUS TRUCK 184	SLUMP 5
---------------	-------------------------------	------------------------------	----------------	-------------	-----------------------	------------

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	130	100		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD	SUBTOTAL
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO		
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal				TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13964 lb	13970 lb	0.04%	2.68% A	44	gl	
ROCKC33#5	1650 lb	16517 lb	16550 lb	0.20%	0.10% M	2	gl	
CEMENT	564 lb	5640 lb	5640 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	4.00 oz #	40.00 oz	41.00 oz	2.50%				
WATER	30.5 gl	239.4 gl	239.0 gl	-0.15%		239.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 284.7 gl To Add: 20.3 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYE



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	01/16/2014	BLISS	0184	Shawn Cool	1091719
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH TO JOB		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
67	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	145	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	50	20		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL
TAX
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

**X**  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17237 lb	17260 lb	0.13%	0.10% M	2	gl	
SANDFAA	1409 lb	14458 lb	14490 lb	0.22%	2.61% A	44	gl	
CEMENT	479 lb	4790 lb	4795 lb	0.10%				
FLYASH	85 lb	850 lb	860 lb	1.18%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
WATER	33.9 gl	272.8 gl	273.0 gl	0.06%		273.0	gl	-2.00 gl

Num Batches: 1

Design W/C: 0.502 Water/Cement: 0.500 T Design 339.0 gl Actual 319.3 gl To Add: 19.7 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CY



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	01/20/2014	BLISS	0194	Wayne Grammer	1091762
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH - SLAB JUST SOUTH OF NEW BUILDING BY SOFTBALL FIELD		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
78	TEC# 000003471 8	ROCKCHALKPAR		INT-FW		5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-564	4000 PSI NO AE	10	10		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL
TAX
TOTAL

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.  
MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

**X**  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
CEMENT	564 lb	5640 lb	5645 lb	0.09%				
ROCKC33#5	1717 lb	17187 lb	17220 lb	0.19%	0.10% M	2	gl	
SANDFAA	1405 lb	14507 lb	14800 lb	0.64%	3.25% A	55	gl	
WATER	33.9 gl	262.2 gl	262.0 gl	-0.08%		262.0	gl	-2.00 gl
WREDUCE1	16.92 oz	169.20 oz	168.00 oz	-0.71%				

Num Batches: 1 Manual 12:35:07

id 39662 lb Design W/C: 0.502 Water/Cement: 0.501 T Design 339.0 gl Actual 319.2 gl To Add: 19.9 gl

mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 01/24/2014	ACCOUNT BLISS	TRUCK 0194	DRIVER NAME Wayne Grammer	TICKET # 1091778
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH/WEST TO SOUTH END OF SOCCER FEILD WHELL BARROW INSIDE		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 32	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION EXTFW	PREVIOUS TRUCK	SLUMP 5
---------------	-------------------------------	------------------------------	------	----------------------	----------------	------------

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	10	10		
10.00	oz	DARASET	DARASET 1.50% NON-CHLC	1	1353.6		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELVN	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

*MEDIC. RM.*  
*OFF*  
*N. END*

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANFAA	1360 lb	13940 lb	14020 lb	0.57%	2.50% M	41	gl	
ROCKC33#5	1650 lb	16533 lb	16560 lb	0.16%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5640 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
AIR1	3.50 oz	35.00 oz	35.00 oz	0.00%				
WATER	30.5 gl	240.3 gl	240.0 gl	-0.13%		240.0	gl	-2.00 gl
DARASET	135.36 oz	1353.60 oz	1344.00 oz	-0.71%				





# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 01/24/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1091789
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - HAUL RD NORTH/WEST TO SOUTH END OF SOCCER FEILD WHELL BARROW INSIDE		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		
38,260					

ORDER # 33	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION WALL	PREVIOUS TRUCK 159	SLUMP 5
---------------	-------------------------------	------------------------------	------	---------------------	-----------------------	------------

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	130	110		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13859 lb	13960 lb	0.73%	1.90% A	31	gl	
ROCKC33#5	1650 lb	16533 lb	16560 lb	0.16%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5650 lb	0.18%				
WREDUCE1	16.92 oz	169.20 oz	168.00 oz	-0.71%				
AIR1	3.00 oz #	30.00 oz	30.00 oz	0.00%				
WATER	30.5 gl	250.0 gl	249.0 gl	-0.40%		249.0	gl	-2.00 gl

Num Batches: 1 Manual 10:35:58

id 38260 lb Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 284.2 gl To Add: 20.8 gl

mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.00 gl / CYL



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	01/31/2014	BLISS	0139	Kevin Tolbert	1091940

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - FOOTING AT FAR WEST SIDE OF PROJECT
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



39,774

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
5	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	194	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	90	90		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

<b>SUBTOTAL</b>
<b>TAX</b>
<b>TOTAL</b>

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17237 lb	17270 lb	0.19%	0.10% M		2 gl	
SANDFAA	1409 lb	14500 lb	14580 lb	0.55%	2.91% A		49 gl	
CEMENT	479 lb	4790 lb	4810 lb	0.42%				
FLYASH	85 lb	850 lb	850 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	267.8 gl	270.0 gl	0.81%		270.0 gl		-2.00 gl

Num Batches: 1 Manual 9:31:20

Design W/C: 0.502 Water/Cement: 0.500 T Design 339.0 gl Actual 321.4 gl To Add: 17.6 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL Note: Manual feed occurred



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	02/22/2014	BLISS	0194	Wayne Grammer	1092153

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - FOOTING AT FAR WEST SIDE OF PROJECT
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



7,973

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
11	TEC# 000003471 8	ROCKCHALKPAR		INT-FW		5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
2.00	yd	40-564	4000 PSI NO AE	2	2		
2.00	ea	SATDC	SATURDAY DELIVERY CHAF	0			
2.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

**SUBTOTAL**  
**TAX**  
**TOTAL**

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**GRAND TOTAL**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X  
 PRINTED NAME TITLE CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
CEMENT	564 lb	1128 lb	1140 lb	1.06%				
ROCKC33#5	1717 lb	3441 lb	3460 lb	0.56%	0.20% M	1	gl	
SANDFAA	1405 lb	2885 lb	2920 lb	+ 1.21%	2.67% A	9	gl	
WATER	33.9 gl	54.0 gl	54.0 gl	0.03%		54.0	gl	-2.00 gl
WREDUCE1	16.92 oz	33.84 oz	34.00 oz	0.47%				

Num Batches: 1  
 Manual 7:04:02  
 id 7973 lb Design W/C: 0.502 Water/Cement: 0.496 T Design 67.8 gl Actual 63.9 gl To Add: 3.9 gl  
 mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYT



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 02/24/2014	ACCOUNT BLISS	TRUCK 0192	DRIVER NAME R L Henley	TICKET # 1092192		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - FOOTING AT FAR WEST SIDE OF PROJECT				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 6	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION WALL	PREVIOUS TRUCK 186	SLUMP 5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	90	90		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT <i>12:25</i>	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.  
MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

**X**  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13913 lb	13930 lb	0.12%	2.30% M	38	gl	
ROCKC33#5	1650 lb	16533 lb	16540 lb	0.04%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5655 lb	0.27%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
AIR1	3.80 oz #	38.00 oz	39.00 oz	2.63%				
WATER	30.5 gl	243.6 gl	244.0 gl	0.18%		244.0	gl	-2.00 gl

Num Batches: 1  
Manual 11:21:01  
Design W/C: 0.451 Water/Cement: 0.450 T Design 305.0 gl Actual 285.5 gl To Add: 19.5 gl  
Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 02/28/2014	ACCOUNT BLISS	TRUCK 0154	DRIVER NAME KEVIN BAILEY	TICKET # 1092235
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - FOOTING AT FAR WEST SIDE OF PROJECT		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 59	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION EXTFW	PREVIOUS TRUCK 194	SLUMP 5
---------------	-------------------------------	------------------------------	------	----------------------	-----------------------	------------

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	20	16		
10.00	oz	DARASET	DARASET 1.0% NON-CHLOF	1	1443.84		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME	TITLE	CUSTOMER SIGNATURE
		<b>X</b>

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13978 lb	13990 lb	0.08%	2.78% A	45	gl	
ROCKC33#5	1650 lb	16533 lb	16540 lb	0.04%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5695 lb	0.98%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
AIR1	3.50 oz	35.00 oz	34.00 oz	-2.86%				
WATER	30.5 gl	235.7 gl	236.0 gl	0.13%		236.0	gl	-2.00 gl
DARASET	90.24 oz	902.40 oz	896.00 oz	-0.71%				



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	03/07/2014	BLISS	0114	BRIAN LINDELOF	1092278
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ONTO JOBSITE - FOOTING AT NORTH END OF TRACK		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
14	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	159	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	50	20		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL
TAX
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways at other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wet	Trim
ROCKC33#5	1722 lb	17289 lb	17340 lb	0.30%	0.40% M	8	gl	
SANDFAA	1409 lb	14442 lb	14530 lb	0.61%	2.50% M	42	gl	
CEMENT	479 lb	4790 lb	4845 lb	+ 1.15%				
FLYASH	85 lb	850 lb	850 lb	0.00%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
WATER	33.9 gl	268.5 gl	268.0 gl	-0.20%		268.0	gl	-2.00 gl

Num Batches: 1 Manual 7:52:06

Design W/C: 0.502 Water/Cement: 0.497 T Design 339.0 gl Actual 318.7 gl To Add: 20.3 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl Load Trim Water: -2.0 gl / CYE Note: Manual feed occurred



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	03/14/2014	BLISS	0194	Wayne Grammer	1092529		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -			6TH ST. WEST - GEORGE WILLIAM WAY NORTH - WEST THROUGH GATE PASTOLD WASHOUT PIT - NORTH TOWARDSTRACK - BACKUP EAST TO PAVER				
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
6		ROCKCHALKREC		SIDEWLK	192	2	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	350	200		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_

PRINTED NAME TITLE

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wet	Trim
SANDFAA	1360 lb	13988 lb	14010 lb	0.16%	2.85% A	47	gl	
ROCKC33#5	1650 lb	16583 lb	16590 lb	0.05%	0.50% M	10	gl	
CEMENT	564 lb	5640 lb	5645 lb	0.09%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	4.30 oz #	43.00 oz	44.00 oz	2.33%				
WATER	30.5 gl	228.6 gl	228.0 gl	-0.27%		228.0	gl	-2.00 gl

Num Batches: 1 Manual 12:48:04

Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 284.5 gl To Add: 20.6 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	03/17/2014	BLISS	0193	Robert Crosby	52000112		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -			6TH ST. WEST - GEORGE WILLIAM WAY NORTH - TURNS WEST SOUTH ON HAUL RD - WEST TOWARDS PAVER JUSTPAST SOCCER FIELD				
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO# OR JOB#	APPLICATION	ZONE CODE	PREVIOUS TRUCK	SLUMP		
23		MAINLINE	LAW	171	2		
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-A564	4000 PSI AE	250	240		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
13:55			
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
 \_\_\_\_\_  
 PRINTED NAME TITLE CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Truck	Driver	User	Disp Ticket Num	Ticket ID	Time	Date
193	2605	buds	52000112	230	15:47	3/17/14
Load Size	Mix Code	Returned	Qty	Mix Age	Seq	Load ID
3.00 CYDS	40-A564				W	300

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	14171 lb	14200 lb	0.20%	4.20% M	69	gal	
ROCKC33#5	1650 lb	16550 lb	16600 lb	0.31%	0.30% M	6	gal	
CEMENT	564.0 lb	5640.0 lb	5650.0 lb	0.18%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	4.20 oz #	42.00 oz	42.00 oz	0.00%				
WATER	30.5 gl	207.0 gl	203.0 gl	-1.94%		203.0	gal	-3.00 lb

Manual 15:46:57  
 Num Batches: 1  
 Design 305.0 gal  
 Actual 277.5 gal To Add: 27.5 gal  
 Water/Cement 0.451 T  
 Adjust Water: 0.0 lb / Load  
 Trim Water: -3.0 lb /  
 CYC Note: Manual feed occurred





# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	03/17/2014	BLISS	0184	Shawn Cool	1092560
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - HAUL RD NORTH - WEST TO FOOTING AT NORTH END OF SOFTBALL FIELD		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
46	TEC# 000003471 8	ROCKCHALKPAR		FOOTING	192	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	40	30		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	17254 lb	17260 lb	0.03%	0.20% M	4	gl	
SANDFAA	1409 lb	14460 lb	14510 lb	0.35%	2.62% A	44	gl	
CEMENT	479 lb	4790 lb	4970 lb	+ 3.76%				
FLYASH	85 lb	850 lb	935 lb	+ 10.00%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
WATER	33.9 gl	270.6 gl	270.0 gl	-0.22%		270.0	gl	-2.00 gl

Num Batches: 1 Manual 8:16:50  
 id 39939 lb Design W/C: 0.502 Water/Cement: 0.479 T Design 339.0 gl Actual 318.6 gl To Add: 20.4 gl  
 mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 / CYT



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
Department of Transportation  
Certifications

PLANT 01	DATE 03/19/2014	ACCOUNT BLISS	TRUCK 0195	DRIVER NAME Marty Trumble	TICKET # 1092632
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - NORTH ON HAUL ROAD - WEST AT END TO NORTHEAST OF TRACK		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 35	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION EXTFW	PREVIOUS TRUCK 113	SLUMP 5
---------------	-------------------------------	------------------------------	------	----------------------	-----------------------	------------

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	40	40		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

X  
\_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13900 lb	14010 lb	0.79%	2.20% A	36	gl	
ROCKC33#5	1650 lb	16550 lb	16670 lb	0.73%	0.30% M	6	gl	
CEMENT	564 lb	5640 lb	5650 lb	0.18%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	4.20 oz #	42.00 oz	42.00 oz	0.00%				
WATER	30.5 gl	243.2 gl	242.0 gl	-0.48%		242.0	gl	-2.00 gl

Num Batches: 1  
Manual 9:22:30  
id 38363 lb Design W/C: 0.451 Water/Cement: 0.451 T Design 305.0 gl Actual 284.2 gl To Add: 20.8 gl  
mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC Note: Manual feed occurred



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 03/19/2014	ACCOUNT BLISS	TRUCK 0114	DRIVER NAME BRIAN LINDELOF	TICKET # 1092651
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - SOUTH ON HAUL ROAD - WEST AT SOUTH END OF SOCCER FIELD TO FOOTING		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 97	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION FOOTING	PREVIOUS TRUCK 184	SLUMP 5
---------------	-------------------------------	------------------------------	------	------------------------	-----------------------	------------

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
8.00	CYDS	30-564F1	3K PSI NO AE FA	38	38		
8.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD	
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	SUBTOTAL
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal				TAX
				TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength; ASTM C31 & ASTM C39; air content; ASTM C231 or ASTM C173; Slump; ASTM C143; Temperature; ASTM C1064; density and or yield; ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
ROCKC33#5	1722 lb	13817 lb	13830 lb	0.09%	0.30% M	5	gl	
SANDFAA	1409 lb	11594 lb	11670 lb	0.66%	2.85% A	39	gl	
CEMENT	479 lb	3832 lb	3835 lb	0.08%				
FLYASH	85 lb	680 lb	690 lb	1.47%				
WREDUCE1	16.92 oz	135.36 oz	135.00 oz	-0.27%				
WATER	33.9 gl	211.7 gl	211.0 gl	-0.33%		211.0	gl	-2.00 gl

Num Batches: 1

Manual 15:41:56

id 31794 lb Design W/C: 0.502 Water/Cement: 0.500 T Design 271.2 gl Actual 254.8 gl To Add: 16.4 gl

mp: 5.00 in # Water in Truck: 0.0 gl Just Water: 0.0 gl / Load Trim Water: -2.0 / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	03/20/2014	BLISS	0195	Marty Trumble	1092702		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - HAUL RD NORTH - WEST ON RAMP BETWEEN SOCCER AND SOFTBALL FIELD				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
123	TEC# 000003471 8	ROCKCHALKPAR		STPATCH	114	4	
37,943							
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	50-A705	5K AE	30	30		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal			

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

**X**  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1276 lb	13027 lb	13030 lb	0.02%	2.09% A	32	gl	
CEMENT	705 lb	7050 lb	7050 lb	0.00%				
ROCKC33#5	1557 lb	15586 lb	15610 lb	0.16%	0.10% M	2	gl	
WREDUCE1	21.15 oz	211.50 oz	211.00 oz	-0.24%				
AIR1	5.20 oz #	52.00 oz	52.00 oz	0.00%				
WATER	32.2 gl	268.1 gl	268.0 gl	-0.04%		268.0	gl	-2.00 gl

Num Batches: 2

Manual 17:19:26

id 37943 lb Design W/C: 0.381 Water/Cement: 0.381 T Design 322.0 gl Actual 301.9 gl To Add: 20.1 gl

mp: 4.00 in Water in Truck: 0.0 gl Just Water: 0.0 gl / Load Trim Water: -2.00 gl / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	03/26/2014	BLISS	0184	Shawn Cool	1092864

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH - WEST THROUGH GATE - NORTH ON CONCRETE HAUL RD TO NORTH PARKING LOT
<b>JOB ADDRESS</b> ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -	



39,637

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
21		ROCKCHALKREC		SOG	194	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-564	4000 PSI NO AE	190	110		
10.00	oz	DARASET	DARASET 1.0% NON-CHLOF	1	9926.4		
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME

TITLE

X  
CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
CEMENT	564 lb	5640 lb	5645 lb	0.09%				
ROCKC33#5	1717 lb	17187 lb	17220 lb	0.19%	0.10% M	2	gl	
SANDFAA	1405 lb	14351 lb	14360 lb	0.06%	2.14% E	36	gl	
WATER	33.9 gl	280.9 gl	281.0 gl	0.05%		281.0	gl	-2.00 gl
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
DARASET	90.24 oz	902.40 oz	896.00 oz	-0.71%				

Num Batches: 1 Manual 9:57:08  
 id 39637 lb Design W/C: 0.502 Water/Cement: 0.501 T Design 339.0 gl Actual 319.2 gl To Add: 19.8 gl  
 mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute  
Certifications




Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	03/27/2014	BLISS	0194	Wayne Grammer	1092910

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST ON FIRST CONCRETE ROAD BY JOB TRAILER TO JOB
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	

	22,926	<b>NOTE:</b> ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!
---	--------	--

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
57	TEC# 000003471 8	ROCKCHALKPAR		ESTEPS		5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
6.00	yd	40-A564	4000 PSI AE	11	6		
6.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

**SUBTOTAL**  
**TAX**  
**TOTAL**

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X \_\_\_\_\_  
PRINTED NAME TITLE CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	8389 lb	8400 lb	0.13%	2.81% A	27	gl	
ROCKC33#5	1650 lb	9959 lb	9990 lb	0.31%	0.60% M	7	gl	
CEMENT	564 lb	3384 lb	3385 lb	0.03%				
WREDUCE1	16.92 oz	101.52 oz	101.00 oz	-0.51%				
AIR1	3.80 oz #	22.80 oz	23.00 oz	0.88%				
WATER	30.5 gl	136.5 gl	137.0 gl	0.40%		137.0	gl	-2.00 gl

Num Batches: 1 Manual 9:03:23  
 id 22926 lb Design W/C: 0.451 Water/Cement: 0.451 T Design 183.0 gl Actual 171.6 gl To Add: 11.4 gl  
 mp: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer



American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	03/29/2014	BLISS	0139	Kevin Tolbert	1092989

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - SOUTH ON HAUL RD - WEST ON NEW CONCRETE PATH JUST SOUTH OF SOCCER FIELD
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



38,274

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
4	TEC# 000003471 8	ROCKCHALKPAR		EXTFW	174	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	110	40		
10.00	ea	SATDC	SATURDAY DELIVERY CHAF	0			
10.00	/y	WINTER	WINTER SERVICE	0			
1.00	ea	FUELVN	FUEL SURCHARGE - PER I	0			

*10:10am  
4 1/2"  
6-9"  
690  
S. WALK S. OF TRAF.*

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_  
PRINTED NAME TITLE  
X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Waste	Trim
SANFAA	1360 lb	13958 lb	14000 lb	0.30%	2.63% A	43	gl	
ROCKC33#5	1650 lb	16533 lb	16570 lb	0.22%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5705 lb	+ 1.15%				
WREDUCE1	16.92 oz	169.20 oz	169.00 oz	-0.12%				
AIR1	3.50 oz	35.00 oz	35.00 oz	0.00%				
WATER	30.5 gl	238.2 gl	238.0 gl	-0.08%		238.0	gl	-2.00 gl

Num Batches: 1  
 Manual 8:01:51  
 Design W/C: 0.451 Water/Cement: 0.446 T Design 305.0 gl Actual 284.9 gl To Add: 20.1 gl  
 Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYE



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 04/01/2014	ACCOUNT BLISS	TRUCK 0151	DRIVER NAME JAMES CORP	TICKET # 1093059
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - HAUL RD SOUTH - WEST INTO PARKING LOT		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		
11,441					

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
50	TEC# 000003471 8	ROCKCHALKPAR		EXTFW	194	5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
3.00	yd	40-A564	4000 PSI AE	33	33		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 11:26	ARRIVE JOB 11:44	START UNLOAD 11:48	FINISH UNLOAD 12:05
LEAVE JOB 12:12	ARRIVE PLANT 12:31	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

CAUTION: Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Trim
SANFAA	1360 lb	4161 lb	4160 lb	-0.03%	1.99% A	10 gl	
ROCKC33#5	1650 lb	4950 lb	4960 lb	0.20%			
CEMENT	564 lb	1692 lb	1700 lb	0.47%			
WREDUCE1	18.92 oz	50.76 oz	52.00 oz	2.44%			
AIR1	3.50 oz	10.50 oz	10.00 oz	-4.76%			
WATER	30.5 gl	75.8 gl	74.0 gl	-2.35%		74.0 gl	-2.00 gl

Num Batches: 1

Design W/C: 0.451 Water/Cement: 0.449 T Design 91.5 gl Actual 83.7 gl To Add: 7.8 gl

Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC





www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

## CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications




MCCI  
Certifications



KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 04/01/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1093047		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - HAUL RD NORTH - WEST ONTO DIRT RAMP BETWEEN SOCCER AND SOFTBALL FIELDS				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 51	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION ESTEPS	PREVIOUS TRUCK SLUMP 5		
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
5.00	yd	40-A564	4000 PSI AE	5	5		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 7:10	ARRIVE JOB 8:25	START UNLOAD 8:40	FINISH UNLOAD 10:55	
LEAVE JOB 10:50	ARRIVE PLANT 11:05	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal				
CAUTION: Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mortar gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.				
DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.				
PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C36, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1064, density and or yield ASTM C139. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.				
ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall, in no event, accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.				
RECEIVED IN GOOD CONDITION BY				
 PRINTED NAME: Casey TITLE: _____				SUBTOTAL TAX TOTAL GRAND TOTAL
X CUSTOMER SIGNATURE NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT				

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trm
SANDFAA	1360 lb	6969 lb	6990 lb	0.31%	2.48% A	20	gl	
ROCKC33#5	1850 lb	8267 lb	8270 lb	0.04%	0.20% M	2	gl	
CEMENT	564 lb	2820 lb	2840 lb	0.71%				
WREDUCE1	16.92 oz	84.60 oz	84.00 oz	-0.71%				
AIR1	3.20 oz #	16.00 oz	15.00 oz	-6.25%				
WATER	30.5 gl	120.3 gl	120.0 gl	-0.27%		120.0	gl	-2.00 gl

ual	Num Batches	1				Manual	8 08 33					
id	19108 lb	Design W/C	0.451	Water/Cement	0.448	T	Design	152.5 gl	Actual	142.2 gl	To Add	10.3 gl
mp	5.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water	-2.0 gl /	CYC			



# PENNY'S

CONCRETE, INC.


23400 W 82ND STREET  
 SHAWNEE MISSION, KANSAS 66227-2705  
 DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
 (800) 322-9710 (800) 524-6474




American Concrete Institute  
 Certifications



M&DOT  
 Certifications



www.pennysconcrete.com  
 An Equal Opportunity Employer

PLANT 01	DATE 04/08/2014	ACCOUNT BLISS	TRUCK 0113	DRIVER NAME TRAVIS MOONEY	TICKET # 1093215
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - WEST AT FIRST CONCRETE RD - NORTH TO PUMP ON SOUTH END OF TRACK		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 61	PO# TEC# 000003471	PROJECT CODE ROCKCHALKPAR	JOB# 30,716	APPLICATION SIDEWLK	PREVIOUS TRUCK 137	SLUMP 5
---------------	--------------------------	------------------------------	----------------	------------------------	-----------------------	------------

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
8.00	yd	40-A564	4000 PSI AE	48	48		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 1711	ARRIVE JOB 1736	START UNLOAD 1747	FINISH UNLOAD 1804
LEAVE SOB 1821	ARRIVE PLANT 1839	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds 8 gal 0 yds gal yds gal yds gal  
 SUBTOTAL  
 TAX  
 TOTAL  
 GRAND TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143 Temperature, ASTM C1064, density and or yield ASTM C138 Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be released by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trm
SANDFAA	1360 lb	11116 lb	11160 lb	0.39%	2.17% A	28	gl	
ROCKC33#5	1650 lb	13279 lb	13340 lb	0.46%	0.60% M	10	gl	
CEMENT	564 lb	4512 lb	4620 lb	+ 2.39%				
WREDUCE1	16.92 oz	135.36 oz	137.00 oz	1.21%				
AIR1	3.80 oz #	30.40 oz	31.00 oz	1.97%				
WATER	30.5 gl	190.2 gl	190.0 gl	-0.10%		190.0	gl	-2.00 gl

Num Batches 1  
 Design 244.0 gl / Load Trm Water  
 Manual 17.07.21  
 Actual 228.0 gl To Add 16.0 gl  
 -2.0 gl / CYL



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
A MEMBER OF THE ABC-ACI  
Certifications

PLANT 01	DATE 04/08/2014	ACCOUNT BLISS	TRUCK 0137	DRIVER NAME BRIAN LINDELOF	TICKET # 1093203		
CUSTOMER NAME BLISS SPORTS LLC JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - NORTH ON HAUL RD TO NORTH PARKING LOT - POURING ON SE CORNER OF REC BUILDING				
			13,958	NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!			
ORDER # 7	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION	PREVIOUS TRUCK 194		
SLUMP 5							
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
3.50	CYDS	30-564F1	3K PSI NO AE FA	12	12		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
					SUBTOTAL		
					TAX		
					TOTAL		
					GRAND TOTAL		

LEAVE PLANT <i>[Signature]</i>	ARRIVE JOB <i>[Signature]</i>	START UNLOAD <i>[Signature]</i>	FINISH UNLOAD <i>[Signature]</i>
LEAVE JOB <i>[Signature]</i>	ARRIVE PLANT <i>[Signature]</i>	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: 2 gal 3 yds gal yds gal yds gal yds gal 3

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and/or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X *[Signature]*  
CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Tnm
ROCKC33#5	1722 lb	6063 lb	6090 lb	0.44%	0.60% M	4	gl	
SANDFAA	1409 lb	5039 lb	5070 lb	0.61%	2.18% A	13	gl	
CEMENT	476 lb	1677 lb	1690 lb	0.81%				
FLYASH	85 lb	298 lb	320 lb	+ 7.56%				
WREDUCE1	16.92 oz	59.22 oz	59.00 oz	-0.37%				
WATER	33.9 gl	94.4 gl	94.0 gl	-0.44%		94.0	gl	-2.00 gl

usl Num Batches 1 Manual 11 37 49  
 id 13958 lb Design W/C 0.502 Water/Cement 0.493 T Design 118.7 gl Actual 111.3 gl To Add 7.3 gl  
 mp 5.00 in # Water in Truck 0.0 gl Adjust Water 0.0 gl / Load Tnm Water -2.0 gl / CYC



# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 04/09/2014	ACCOUNT BLISS	TRUCK 0112	DRIVER NAME LANCE ATKINS	TICKET # 1093249		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - NORTH TO PUMP AT SOUTH END OF TRACK				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 9	PO# TEC# 000003471	PROJECT CODE ROCKCHALKPAR	JOB# 8	APPLICATION EXTFW	PREVIOUS TRUCK 184		
SLUMP 5							
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	50	50		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 1850	ARRIVE JOB 1911	START UNLOAD 1917	FINISH UNLOAD 2034
LEAVE JOB 2045	ARRIVE PLANT 2106	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds 10 gal 40

CAUTION: Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

Casey  
PRINTED NAME

Assoc  
TITLE

x Casey  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Trim
SANDFAA	1360 lb	13936 lb	13940 lb	0.03%	2.47% A	40 gl	
ROCKC33#5	1650 lb	16599 lb	16600 lb	0.01%	0.60% M	12 gl	
CEMENT	564 lb	5640 lb	5645 lb	0.09%			
WREDUCE1	18.92 oz	189.20 oz	188.00 oz	-0.71%			
AIR1	4.00 oz #	40.00 oz	41.00 oz	2.50%			
WATER	30.5 gl	232.9 gl	231.0 gl	-0.81%		231.0 gl	-2.00 gl

ual	Design W/C	0.451	Water/Cement	0.451	T	Design	305.0 gl	Actual	283.1 gl	To Add	21.9 gl
mp	5.00 in #	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water	-2.0 gl /	CYE			



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
REPUBLIC OF THE STATE OF  
Certifications

PLANT 01	DATE 04/09/2014	ACCOUNT BLISS	TRUCK 0149	DRIVER NAME KEVIN BLACK	TICKET # 1093221
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -			6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - NORTH ON HAUL RD TO NORTH PARKING LOT - POURING ON SE CORNER OF REC BUILDING		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		
ORDER # 18	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION	PREVIOUS TRUCK 159
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED
1.00	yd	AG601G	6 SACK AE GROUT	3	3
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0	
					SLUMP 3

LEAVE PLANT 0852	ARRIVE JOB 0908	START UNLOAD 0912	FINISH UNLOAD 0940
LEAVE JOB 0953	ARRIVE PLANT 1012	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO NA

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

CAUTION: Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, or content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064 density and or yield ASTM C138 Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing and protection of all concrete after delivery to the curb line. The placement, consolidation, curing and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME: BLISS TITLE: C.O.

CUSTOMER SIGNATURE: BLISS  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wet	Trm
SANDFAA	2745 lb	2807 lb	2900 lb	+ 3.30%	2.27% A	8	gl	
CEMENT	564 lb	564 lb	580 lb	2.84%				
AIR1	4.00 oz	4.00 oz	5.00 oz	25.00%				
WATER	34.0 gl	26.5 gl	27.0 gl	1.73%		27.0	gl	gl

Num Batches	1	Design	34.0 gl	Manual	8.46 28
Water/Cement	0.499 A	Design	34.0 gl	Actual	34.7 gl
Adjust Water	0.0 gl	0.0 gl / Load	Trm Water	To Add	0.0 gl
Water in Truck	0.0 gl			CY	



# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	04/10/2014	BLISS	0112	LANCE ATKINS	1093265		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - NORTH ON HALL RD TO END - WEST TO NORTH END OF SOFTBALL FIELD - PAVING (SUNFLOWER)				
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
149	TEC# 000003471 8	ROCKCHALKPAR		EXTFW		5	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	10	10		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 1623	ARRIVE JOB 1646	START UNLOAD 1705	FINISH UNLOAD 1909
LEAVE JOB 1927	ARRIVE PLANT 1945	TEST CYLINDERS TAKEN BEFORE H2O ADDED <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds 10 gal 20 yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be released by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

Casey PRINTED NAME      Assoc TITLE      X Casey CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Trm
SANDFAA	1360 lb	13901 lb	13930 lb	0.21%	2.21% A	36 gl	
ROCKC33#5	1650 lb	16599 lb	16630 lb	0.19%	0.80% M	12 gl	
CEMENT	564 lb	5640 lb	5645 lb	0.09%			
WREDUCE1	16.92 oz	169.20 oz	168.00 oz	-0.71%			
AIR1	4.00 oz #	40.00 oz	39.00 oz	-2.50%			
WATER	30.5 gl	237.0 gl	236.0 gl	-0.44%		236.0 gl	-2.00 gl

ual	Num Batches	1	Manual	16.16.25								
id	38187 lb	Design W/C	0.451	Water/Cement	0.451	T	Design	305.0 gl	Actual	284.1 gl	To Add	20.9 gl
mp	5.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl	/ Load	Trm Water	-2.0 gl	/	CYL	



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
Department of Transportation  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	04/11/2014	BLISS	0137	BRIAN LINDELOF	1093345
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - NORTH ON HALL RD TO END - WEST TO NORTH END OF TRACK - TURNAROUND AND BACK WEST TO CREW		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

37,927

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
54	TEC# 000003471	ROCKCHALKPAR			194	5
8						

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	50-A705	5K AE	440	440		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

*Raw No*  
SUBTOTAL  
TAX  
TOTAL  
*OUT OF WATER*

LEAVE PLANT <i>1932</i>	ARRIVE JOB <i>2153</i>	START UNLOAD <i>2150</i>	FINISH UNLOAD <i>2129</i>
LEAVE JOB <i>2139</i>	ARRIVE PLANT <i>2134</i>	TEST CYLINDERS TAKEN BEFORE H2O ADDED <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or material gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK. GRAND TOTAL

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards: Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and/or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X *Raw File*  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1276 lb	13075 lb	13080 lb	0.04%	2.47% A	38	gl	
CEMENT	705 lb	7050 lb	7050 lb	0.00%				
ROCKC33#5	1557 lb	15601 lb	15620 lb	0.12%	0.20% M	4	gl	
WREDUCE1	21.15 oz	211.50 oz	211.00 oz	-0.24%				
AIR1	4.50 oz #	45.00 oz	44.00 oz	-2.22%				
WATER	32.2 gl	260.5 gl	259.0 gl	-0.59%		259.0	gl	-2.00 gl

ual	Num Batches	2	Manual	19 31 22								
id	37927 lb	Design W/C	0.381	Water/Cement	0.381	T	Design	322.0 gl	Actual	300.5 gl	To Add	21.5 gl
mp	5.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water	-2.0 gl /	CYL			



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute®  
Certifications



Certifications



Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	04/11/2014	BLISS	0184	Shawn Cool	1093333

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - NORTH ON HAUL RD - WEST ON CONCRETE RAMP BETWEEN SOFTBALL AND SOCCER FIELDS TO JOB - SIDEWALK (BLISS CREW)
<b>JOB ADDRESS</b> 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS	



38,253

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
69	TEC# 000003471 8	ROCKCHALKPAR		HANDPAV	108	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	60	60		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 512	ARRIVE JOB 532	START UNLOAD 540	FINISH UNLOAD 725
LEAVE JOB 742	ARRIVE PLANT	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mortar gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveway, and other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the rear truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1064, density and/or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials here sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser or returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY  
  
 PRINTED NAME: Baddy  
  
 TITLE: Simon  
 CUSTOMER SIGNATURE:   
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wat	Trim
SANDFAA	1360 lb	13877 lb	13890 lb	0.10%	2.03% A	33	gl	
ROCKC33#5	1650 lb	16533 lb	16570 lb	0.22%	0.20% M	4	gl	
CEMENT	564 lb	5640 lb	5710 lb	> 1.24%				
WREDUCE1	16.92 oz	169.20 oz	170.00 oz	0.47%				
AIR1	4.00 oz #	40.00 oz	40.00 oz	0.00%				
WATER	30.5 gl	247.9 gl	248.0 gl	0.05%		248.0	gl	-2.00 gl

Num Batches	1	Design	305.0 gl	Actual	285.2 gl	Manual	17.06.49
Design W/C	0.451	Water/Cement	0.446 T	Trim Water	-2.0 gl	To Add	19.8 gl
Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load				





www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474


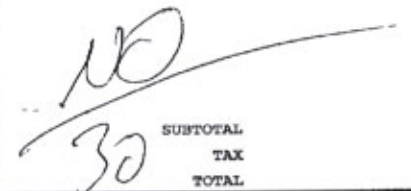


American Concrete Institute  
Certifications



Certifications

KANSAS  
CERTIFICATIONS

PLANT 01	DATE 04/12/2014	ACCOUNT BLISS	TRUCK 0170	DRIVER NAME Michael Youngber	TICKET # 1093364		
CUSTOMER NAME BLISS SPORTS LLC JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - NORTH ON HALL RD TO END - WEST TO NORTH END OF TRACK - TURNAROUND AND BACK WEST TO CREW				
			NOTE. ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 32	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION MAINLINE	PREVIOUS TRUCK 183	SLUMP 5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	50-A705	5K AE	200	190		
17.63	oz	RETARD	WR GRACE RECOVER RETAF	1	2467.5		
10.00	ea	SATDC	SATURDAY DELIVERY CHAF	0			
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
LEAVE PLANT 1257	ARRIVE JOB 114	START UNLOAD 154	FINISH UNLOAD 220				
LEAVE JOB 240	ARRIVE PLANT 330	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input type="checkbox"/> NO				
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS			yds gal yds gal yds gal yds gal _____				
CAUTION: Cement powder or highly mixed concrete grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water if any cement powder or mortar gets into the eyes, nose, immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.				GRAND TOTAL			
DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.				PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39 or concrete ASTM C231 or ASTM C173 Slump ASTM C143 Temperature ASTM C1064 density and/or yield ASTM C136 Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.			
ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accordance with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.				MSDS and Len Law information on reverse side			

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Wet	Tnn
SAND/FAA	1275 lb	13025 lb	13050 lb	0.19%	2.08% A	32	gl	
CEMENT	705 lb	7050 lb	7050 lb	0.00%				
ROCKC33#5	1557 lb	15601 lb	15670 lb	0.44%	0.20% M	4	gl	
WREDUCE1	21.15 oz	211.50 oz	211.00 oz	-0.24%				
AIR1	4.50 oz #	45.00 oz	44.00 oz	-2.22%				
WATER	32.2 gl	266.5 gl	266.0 gl	-0.19%		266.0	gl	-2.00 gl
RETARD	17.63 oz	176.25 oz	176.00 oz	-0.14%				

usl	Num Batches	2	Manual	12.51.00								
sd	38017 lb	Design W/C	0.381	Water/Cement	0.381	T	Design	322.0 gl	Actual	301.6 gl	To Add	20.4 gl
mp	5.00 in #	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Tnn Water	-2.0 gl /	CYL				



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
Certifications

PLANT 01	DATE 04/14/2014	ACCOUNT BLISS	TRUCK 0112	DRIVER NAME LANCE ATKINS	TICKET # 52000129		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - NORTH ON HAUL RD - TO TICKET BOOTH SLAB				
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
			38,278				
ORDER # 46	PO# OR JOB# TEC# 0000034718	APPLICATION EXTFW	ZONE CODE LAW	PREVIOUS TRUCK 184	SLUMP 5		
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	40-A564	4000 PSI AE	30	20		
10.00	oz	DARASET	DARASET 1.0% NON-CHLOF	1	1804.8		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
SUBTOTAL							
TAX							
TOTAL							
GRAND TOTAL							
LEAVE PLANT 1001	ARRIVE JOB 1021	START UNLOAD 1031	FINISH UNLOAD				
LEAVE JOB 1116	ARRIVE PLANT 1153	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO				
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds 10 gal 20 yds gal yds gal yds gal yds gal							
<p>CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.</p> <p>ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK</p> <p>DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.</p> <p>PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 &amp; ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.</p> <p>ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.</p> <p style="text-align: right;">MSDS and Lien Law information on reverse side</p>							

RECEIVED IN GOOD CONDITION BY

Casey  
PRINTED NAME

Assoc  
TITLE

X Casey  
CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Truck 112 Driver 10104 User sdavis Disp Ticket Num 52000129 Ticket ID 245 Time Date 9:52 4/14/14

Load Size Mix Code Returned Qty Mix Age Seq Load ID  
3.00 CYDS 40-A564 326

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Tm
SANFAA	1360 lb	14035 lb	14040 lb	0.03%	3.20% M	52 gal	
ROCKC33#5	1650 lb	16517 lb	16550 lb	0.26%	0.10% M	2 gal	
CEMENT	564 0 lb	5640 0 lb	5640 0 lb	0.00%			
WREDUCE1	16 92 oz	169 20 oz	170 00 oz	0.47%			
AIR1	3 50 oz	35 00 oz	35 00 oz	0.00%			
WATER	30 5 gl	240 9 gl	236 0 gl	-2.02%		236 0 gal	-2.00 gl
DARASET	90 24 oz	902 40 oz	896 00 oz	-0.71%			

usl Num Batches 1 Manual 9 52 44  
id 38278 lb Design W/C 0.451 Water/Cement: 0.451 T Design 305 0 gal Actual 290 2 gal To Add 14 8 g



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications



PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	04/15/2014	BLISS	0114	ANDY PATTERSON	1093369
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - NORTH ON HALL RD TO END - WEST TO NORTH END OF TRACK		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

26,788

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
19	TEC# 000003471 8	ROCKCHALKPAR		EXTFW		5	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
7.00	yd	40-A564	4000 PSI AE	7	7		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 9:55	ARRIVE JOB 10:10	START UNLOAD 10:15	FINISH UNLOAD 10:30
LEAVE JOB 10:45	ARRIVE PLANT 11:07	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing and protection of all concrete after delivery to the curb line. The placement, consolidation, curing and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

<i>Juan</i>	<i>ASSOC</i>	<i>X Juan</i>
PRINTED NAME	TITLE	CUSTOMER SIGNATURE
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT		

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1360 lb	9715 lb	9720 lb	0.05%	2.04% A		23 gl	
CKC33#5	ASTM C33 COMM	1650 lb	11573 lb	11630 lb	0.49%	0.20% M		3 gl	
MENT	BUZZI CG	564 lb	3948 lb	3685 lb	0.94%				
REDUCE1	WE GRACE ADV/	16.92 oz	118.44 oz	118.00 oz	-0.37%				
WATER	WR GRACE DAR/	4.00 oz #	28.00 oz	28.00 oz	0.00%				
		30.5 gl	173.4 gl	173.0 gl	-0.23%			173.0 gl	

Manual	9.38.09
Design	213.5 gl
Actual	199.1 gl
To Add	14.4 gl
CYT Note	Manual feed occurred





# PENNY'S

## CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute®  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 04/15/2014	ACCOUNT BLISS	TRUCK 0122	DRIVER NAME TRAVIS MOONEY	TICKET # 1093367
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - NORTH ON HALL RD TO END - WEST TO NORTH END OF TRACK - TURNAROUND AND BACK WEST TO CREW		
			NOTE ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

3,844

ORDER # 98	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB#	APPLICATION BOXTOP	PREVIOUS TRUCK	SLUMP 1	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
1.00	yd	AG809G	8 SACK AE FA GRO	1	1		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 938	ARRIVE JOB 952	START UNLOAD 956	FINISH UNLOAD 1130
LEAVE JOB 1140	ARRIVE PLANT 1156	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal			

SUBTOTAL  
TAX  
TOTAL

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

GRAND TOTAL

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and or yield: ASTM C138. Slump and air entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME	TITLE	X CUSTOMER SIGNATURE NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT
--------------	-------	--

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
lenal	PAI LAWRENCE	2518 lb	2587 lb	2570 lb	0.13%	1.93% A		6 gl	
NDFAA	BUZZI CG	640 lb	840 lb	925 lb	> 44.53%				
MENT	HEADWATERS TI	112 lb	112 lb	115 lb	2.68%				
/ASH	WATER	35.0 gl	25.2 gl	28.0 gl	> 11.20%			28.0 gl	
TER	WR GRACE DAR	3.00 oz #	3.00 oz	00 oz	100.00%				

ual	Num Batches	1	Manual	9 20 24
id	3844 lb Design W/C	0.388	Water/Cement	0.281 T
mp	1.00 in # Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load
			Des-ign	35.0 gl
			Actual	33.8 gl
			To Add	1.2 gl
			Trim Water	-4.0 gl /
			CYE	



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute  
Certifications



Certifications

KANSAS  
Certifications

PLANT 01	DATE 04/18/2014	ACCOUNT BLISS	TRUCK 0159	DRIVER NAME DOUG BERG	TICKET # 52000140		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TO SIDEWALK ON EAST SIDE OF GEORGE WILLIAMS WAY				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 109	PO# OR JOB#	APPLICATION INT-FW	ZONE CODE LAW	PREVIOUS TRUCK	SLUMP 5		
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
4.00	CYDS	40-564	4000 PSI NO AE	4	4		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 13:12	ARRIVE JOB 15:38	START UNLOAD 15:41	FINISH UNLOAD 17:41
LEAVE JOB 17:51	ARRIVE PLANT 18:18	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal			

SUBTOTAL	
TAX	
TOTAL	
GRAND TOTAL	

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and/or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

*Casper* (Signature)  
PRINTED NAME: Casper TITLE: *sdavis* CUSTOMER SIGNATURE: *Casper*

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Truck	Driver	User	Disp	Ticket Num	Ticket ID	Time	Date
159	1035	sdavis		52000140	254	15:07	4/18/14
Load Size	Mix Code	Returned	Qty	Mix Age	Seq	Load ID	
.00	CYDS 40-564				W2	337	
Material	Design Qty	Required	Batched	% Var	% Moisture	Actual	Trim
CEMENT	564.0 lb	2256.0 lb	2295.0 lb	1.73%			
ROCKC33#5	1717 lb	6875 lb	6880 lb	0.07%	0.10% M	1 gal	
SANDFAA	1405 lb	5800 lb	5800 lb	0.00%	3.20% M	22 gal	
WATER	33.9 gal	59.2 gal	57.0 gal	-3.76%		57.0 gal	-2.00 gal
WREDUCE1	16.92 oz	67.68 oz	68.00 oz	0.47%			
Num Batches	1						
Manual	15:06:22						
Design	135.6 gal	Actual	79.4 gal	To Add	8.2 gal		
Adjust Water	0.0 gal / Load	Trim Water	-2.0 gal /	CYE Note	Manual feed occurred		



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
LEADERSHIP IN READY MIXED CONCRETE  
Certifications

PIB#	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	04/18/2014	BLISS	0137	BRIAN LINDELOF	1093466
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TO SIDEWALK ON EAST SIDE OF GEORGE WILLIAMS WAY		
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
108		ROCKCHALKREC		EXTFW	184	1	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
2.00	CYDS	AG811G	GROUT 2 TO 1 SAN	3	3		
0.00	cy	ECLIPSE2	WR GRACE SHRINKAGE COM	1	2		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
10:06	11:58	11:33	12:51
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
12:01	1:30	BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and/or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

erial	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	2069 lb	4237 lb	4260 lb	0.54%	2.40% A		12	gl
MENT	BUZZI CG	852 lb	1704 lb	1820 lb	>	6.81%			
/ASH	HEADWATERS TI	150 lb	300 lb	300 lb	0.00%				
:1	WR GRACE DARV	1.50 oz	3.00 oz	00 oz	100.00%				
ATER	WATER	50.0 gl	80.1 gl	80.0 gl	-0.13%			80.0	gl

ual	Num Batches	1	Manual	10.49	22
id	7048 lb	Design W/C	0.416	Water/Cement	0.394
mp	1.00 in	#	Water in Truck	0.0 gl	Adjust Water
				0.0 gl / Load	Trm Water
				-4.0 gl /	CYC
				Design	100.0 gl
				Actual	92.0 gl
				To Add	8.0 gl



# PENNY'S

## CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
Department of Transportation  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 04/22/2014	ACCOUNT BLISS	TRUCK 0113	DRIVER NAME TONY RICHESON	TICKET # 1093521
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - HALL RD NORTH TO NORTH PARKING LOT (SUNFLOWER CREW)		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 138	PO# TEC# 000003471	PROJECT CODE ROCKCHALKPAR	JOB# 22,996	APPLICATION WALL	PREVIOUS TRUCK 184	SLUMP 5
----------------	--------------------------	------------------------------	----------------	---------------------	-----------------------	------------

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
6.00	yd	40-A564	4000 PSI AE	16	16		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT <i>6:04</i>	ARRIVE JOB <i>6:23</i>	START UNLOAD <i>1:33</i>	FINISH UNLOAD <i>6:40</i>
LEAVE JOB <i>6:45</i>	ARRIVE PLANT <i>1:29</i>	TEST CYLINDERS TAKEN BEFORE H <sub>2</sub> O ADDED <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

SUBTOTAL
TAX
TOTAL

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK. **GRAND TOTAL**

DELIVERY AGREEMENT This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and/or yield: ASTM C138, Slump and air-entrainment: variances in accordance to ASTM C84 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

*Bliss*

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

*X Bliss*

CUSTOMER SIGNATURE \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1360 lb	8320 lb	8370 lb	0.60%	1.96% A		19 gl	
CKC33#57	ASTM C33 COMM	1650 lb	9920 lb	9980 lb	0.61%	0.20% M		2 gl	
MENT	BUZZI CG	564 lb	3384 lb	3395 lb	0.33%				
REDUCE1	WE GRACE ADV/	16.92 oz	101.52 oz	102.00 oz	0.47%				
11	WR GRACE DAR/	3.50 oz	21.00 oz	21.00 oz	0.00%				
1TER	WATER	30.5 gl	149.4 gl	149.0 gl	-0.29%			149.0 gl	

Manual	17.59	25
Actual	170.7	gl
To Add	12.3	gl

Num Batches	1
Design W/C	0.451
Water/Cement	0.450
Adjust Water	0.0 gl
Design	183.0 gl
Actual	170.7 gl
Manual	17.59
To Add	12.3 gl





www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



McGraw Hill  
Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	04/23/2014	BLISS	0195	Marty Trumble	1093549
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - START POURING AT TRANSFORMER PAD ON SE CORNER OF RECCENTER THEN FINISH LIGHT POLE BASES		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

38,221

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
118	TEC# 000003471	ROCKCHALKPAR		POLEBASE	152	5
8						

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	30	30		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
3:17	3:39	3:40	4:38
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN	BEFORE H2O ADDED
4:38	3:45	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mortar gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, and other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing. Towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and/or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY

Casey Boess x Casey

PRINTED NAME TITLE CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
DFAA	PAI LAWRENCE	1360 lb	13855 lb	13890 lb	0.25%	1.88% A		31 gl	
CKC33#5	ASTM C33 COMM	1650 lb	16533 lb	16550 lb	0.10%	0.20% M		4 gl	
MENT	BUZZI CG	564 lb	5640 lb	5690 lb	0.89%				
REDUCE	WE GRACE ADV/	16.92 oz	169.20 oz	168.00 oz	-0.71%				
11	WR GRACE DAR/	3.50 oz	35.00 oz	34.00 oz	-2.86%				
1TER	WATER	30.5 gl	250.5 gl	249.0 gl	-0.59%			249.0 gl	

Material	Design	Actual	Manual	To Add
Water	305.0 gl	283.6 gl	15.15.06	21.4 gl
Water in Truck	0.0 gl	-2.0 gl		



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PISTON #	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	04/25/2014	BLISS	0184	Shawn Cool	1093556
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - HALL RD NORTH WEST AT END TOSIDEWALK BETWEEN SOFTBALL FIELDAND NORTH PARKING LOT		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

38,155

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
85	TEC# 000003471 8	ROCKCHALKPAR		SIDEWLK	195	5

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	20	20		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 9:32	ARRIVE JOB 10:07	START UNLOAD 10:37	FINISH UNLOAD 11:50
LEAVE JOB 11:58	ARRIVE PLANT 12:01	TEST CYLINDERS TAKEN BEFORE H2O ADDED <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

GRAND TOTAL

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME <i>Casa</i>	CUSTOMER SIGNATURE <i>[Signature]</i>
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT	

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NOFAA	PAI LAWRENCE	1360 lb	13907 lb	13920 lb	0.09%	2.26% A		37 gl	
CKC33#5	ASTM C33 COMM	1850 lb	18533 lb	16550 lb	0.10%	0.20% M		4 gl	
MENT	BUZZI CG	564 lb	5640 lb	5645 lb	0.09%				
REDUCE1	WE GRACE ADV/	16.92 oz	169.20 oz	168.00 oz	-0.71%				
11	WR GRACE DAR/	3.50 oz	35.00 oz	34.00 oz	-2.86%				
TER	WATER	30.5 gl	244.2 gl	243.0 gl	-0.50%			243.0 gl	

ual	Num Batches	1					Manual	9 47 34		
id	38155 lb	Design W/C	0.451	Water/Cement	0.451 T	Design	305.0 gl	Actual	283.8 gl To Add	21.2 gl
mp	5.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trm Water	-2.0 gl /	CYT	



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
Certifications

PLANT 01	DATE 04/25/2014	ACCOUNT BLISS	TRUCK 0184	DRIVER NAME Shawn Cool	TICKET # 1093561
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - HALL RD NORTH TO NORTH PARKING LOT (SUNFLOWER CREW)		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

38,239

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
96	TEC# 000003471 8	ROCKCHALKPAR		POLEBASE	139	3

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	20	20		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 1243	ARRIVE JOB 100	START UNLOAD 107	FINISH UNLOAD 148
LEAVE JOB 159	ARRIVE PLANT 217	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS		BEFORE H2O ADDED <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	

SUBTOTAL  
TAX  
TOTAL

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064 density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall, in no event, accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

GRAND TOTAL

RECEIVED IN GOOD CONDITION BY

PRINTED NAME: Shawn Cool TITLE: AG CUSTOMER SIGNATURE: [Signature]

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1360 lb	13937 lb	13930 lb	-0.05%	2.48% A		40 gl	
CKC33#5	ASTM C33 COMM	1650 lb	16632 lb	16730 lb	0.59%	0.80% M		16 gl	
MENT	BUZZI CG	564 lb	5640 lb	5655 lb	0.27%				
REDUCE1	WE GRACE ADV/	16.92 oz	169.20 oz	170.00 oz	0.47%				
WT	WR GRACE DAR/	3.50 oz	35.00 oz	34.00 oz	-2.86%				
WATER		30.5 gl	228.6 gl	229.0 gl	0.07%			229.0 gl	

Num Batches	1	Manual	12 38 34
Design W/C	0.451	Water/Cement	0.450 T
Design	305.0 gl	Actual	285.2 gl
Design	3.00 in	To Add	19.8 gl
Adjust Water	0.0 gl	Water in Truck	0.0 gl
Load	0.0 gl / Load	Trim Water	-2.0 gl /
		CYI	



# PENNY'S

## CONCRETE, INC.

23400 W 82ND STREET  
 SHAWNEE MISSION, KANSAS 66227-2705  
 DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
 (800) 322-9710 (800) 524-6474




American Concrete Institute\*  
 Certifications



Certifications

KANSAS  
 CERTIFICATIONS

www.pennysconcrete.com  
 An Equal Opportunity Employer

PLANT 01	DATE 04/25/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1093564
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - HALL RD NORTH -WEST AT END TO NORTH END OF TRACK		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

11,530

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
129	TEC# 000003471 8	ROCKCHALKPAR		SIDEWLK	195	5

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
3.00	yd	40-A564	4000 PSI AE	13	13		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 2:45	ARRIVE JOB 2:45	START UNLOAD 2:45	FINISH UNLOAD 3:10
LEAVE JOB 3:20	ARRIVE PLANT 3:35	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS		yds gal	yds gal

SUBTOTAL  
TAX  
TOTAL

GRAND TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and/or yield: ASTM C136. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME: \_\_\_\_\_ TITLE: \_\_\_\_\_

CUSTOMER SIGNATURE: X \_\_\_\_\_

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Water
NDFAA	PAI LAWRENCE	1360 lb	4178 lb	4180 lb	0.04%	2.41% A		12 gl	
CKC33#5	ASTM C33 COMM	1650 lb	4990 lb	5010 lb	0.41%	0.80% M		5 gl	
MENT	BUZZI CG	564 lb	1692 lb	1760 lb	> 4.02%				
REDUCE1	WE GRACE ADV	16.92 oz	50.76 oz	50.00 oz	-1.50%				
t1	WR GRACE DAR	3.50 oz	10.50 oz	12.00 oz	14.29%				
TER	WATER	30.5 gl	69.0 gl	69.0 gl	0.03%			69.0 gl	

Material	Description	Design W/C	Water/Cement	Adjust Water	Design	Actual	To Add
ual	Num Batches	1				Manual	14.21.43
id	11530 lb	0.451	0.434	T	91.5 gl	85.5 gl	8.0 gl
mp	5.00 in #	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	-2.0 gl /	CYE





# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #		
01	04/30/2014	BLISS	0184	Shawn Cool	1093591		
CUSTOMER NAME			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS				
BLISS SPORTS LLC			6TH ST. WEST - GEORGE WILLIAM WAY NORTH TO				
JOB ADDRESS			SIDEWALK ON EAST SIDE OF GEORGE WILLIAMS WAY				
ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -							
			NOTE:				
3,521			ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
79		ROCKCHALKREC		RIPRAP		1	
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
1.00	CYDS	AG811G	GROUT 2 TO 1 SAN	1	1		
1.00	cy	ECLIFSE2	WR GRACE SHRINKAGE COM	1	1		
1.00	ea	FUELVN	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input type="checkbox"/> NO <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X \_\_\_\_\_  
 PRINTED NAME TITLE CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Water
NDFAA	PAI LAWRENCE	2069 lb	2125 lb	2140 lb	0.66%	2.73% A		7 gl	
MENT	BUZZI CG	852 lb	852 lb	855 lb	0.35%				
ASH	HEADWATERS T1	150 lb	150 lb	150 lb	0.00%				
T1	WR GRACE DAR/	1.50 oz	1.50 oz	.00 oz	100.00%				
TER	WATER	50.0 gl	43.2 gl	45.0 gl	4.08%			45.0 gl	

Material	Design W/C:	0.416	Water/Cement:	0.430	A	Design	50.0 gl	Actual	51.8 gl	To Add:	0.0 gl
mp:	1.00 in #	Water in Truck:	0.0 gl	Adjust Water:	0.0 gl / Load	Trim Water:	0.0 gl /	CYE			

Manual 8:46:35



# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710

(800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute  
Certifications



Certifications

KANSAS  
MEMBER OF THE ASSOCIATION  
Certifications

PHONE	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	05/01/2014	BLISS	0159	DOUG BERG	1093613
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TO SIDEWALK ON EAST SIDE OF GEORGE WILLIAMS WAY		
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
30		ROCKCHALKREC		INT-FW	206	5	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
4.00	yd	40-564	4000 PSI NO AE	9	9		
4.00	oz	DARASET	DARASET 1.0% NON-CHLOF	1	812.16		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL				TAX	
TOTAL				TOTAL	
GRAND TOTAL				GRAND TOTAL	

LEAVE PLANT 0743 ARRIVE JOB 0807 START UNLOAD 0812 FINISH UNLOAD 0856

LEAVE JOB 0907 ARRIVE PLANT 0925 TEST CYLINDERS TAKEN  YES  NO BEFORE H2O ADDED  YES  NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

CAUTION: Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1364 density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY

*Lithko* *ASSOL* x *Lithko*

PRINTED NAME TITLE CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
MENT	BUZZI CG	564 lb	2256 lb	2260 lb	0.18%				
CKC33#57	ASTM C33 COMM	1717 lb	6950 lb	6960 lb	0.14%	1.20% M		10 gl	
NDFAA	PAI LAWRENCE	1405 lb	5755 lb	5810 lb	0.95%	2.41% A		16 gl	
TER	WATER	33.9 gl	101.5 gl	101.0 gl	-0.50%			101.0 gl	
REDUCE1	WE GRACE ADV/	16.92 oz	67.68 oz	67.00 oz	-1.00%				
RASET	WR GRACE DAR/	90.24 oz	360.96 oz	368.00 oz	1.95%				

Num Batches	1	Manual	7.3915
Design W/C	0.502	Actual	127.3 gl
Design	135.6 gl	To Add	8.3 gl
Water/Cement	0.501 T		
Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load
			Trm Water
			-2.0 gl / CYL



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
LEADERSHIP IN QUALITY  
Certifications

PLANT 01	DATE 05/02/2014	ACCOUNT BLISS	TRUCK 0122	DRIVER NAME TRAVIS MOONEY	TICKET # 1093646		
CUSTOMER NAME BLISS SPORTS LLC JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TO PUMP				
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 84	PO# TEC# 000003471 8	PROJECT CODE ROCKCHALKPAR	JOB# 38,127	APPLICATION SIDEWLK	PREVIOUS TRUCK 114 SLUMP 5		
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	100	20		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
			Fiber 10 bags				
LEAVE PLANT 1308	ARRIVE JOB 1329	START UNLOAD 1354	FINISH UNLOAD 1424				
LEAVE JOB 1434	ARRIVE PLANT 1452	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	SUBTOTAL			
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds 10 gal 22 yds 5 gal 4 yds gal yds gal				TAX			
				TOTAL			
CAUTION! Cement powder or freshly mixed concrete grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.				GRAND TOTAL			
DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.							
PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1064, density and/or yield ASTM C138, Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.							
ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.							

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

X  
CUSTOMER SIGNATURE \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1360 lb	13926 lb	13920 lb	-0.04%	2.40% A		39 gl	
CKC33#5	ASTM C33 COMM	1650 lb	16698 lb	16710 lb	0.07%	1.20% M		24 gl	
MENT	BUZZI CG	564 lb	5640 lb	5640 lb	0.00%				
REDUCE1	WE GRACE ADV/	16.92 oz	169.20 oz	169.00 oz	-0.12%				
t1	WR GRACE DAR/	3.50 oz	35.00 oz	36.00 oz	2.86%				
ATER	WATER	30.5 gl	222.2 gl	221.0 gl	-0.54%			221.0 gl	

ual	Num Batches	1				Manual	13 03 42				
id	38127 lb Design W/C	0.451	Water/Cement	0.451	T	Design	305.0 gl	Actual	283.8 gl	To Add	21.2 gl
mp	5.00 in # Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trm Water	-2.0 gl /	CY				





# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
 SHAWNEE MISSION, KANSAS 66227-2705  
 DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
 (800) 322-9710 (800) 524-6474




American Concrete Institute\*  
 Certifications



Certifications

KANSAS  
 DEPARTMENT OF TRANSPORTATION  
 Certifications

www.pennysconcrete.com  
 An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	05/02/2014	BLISS	0139	Kevin Tolbert	1093632
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH TURNS WEST - HALL RD SOUTH - PARKING LOT SOUTH OF THE SOCCER FIELD		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		
ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK
101	TEC# 000003471	ROCKCHALKPAR		POLEBASE	4
QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED
10.00	yd	40-A564	4000 PSI AE	10	10
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0	

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
7:55	12:10	10:15	10:55
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
11:10	12:20	BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal			

SUBTOTAL  
 TAX  
 TOTAL

CAUTION: Cement powder or freshly mixed concrete grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK. GRAND TOTAL

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, lowering will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature, ASTM C1064 density and yield: ASTM C138. Slump and air-entrainment variations in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall, in no event, accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME: \_\_\_\_\_ TITLE: \_\_\_\_\_  
 CUSTOMER SIGNATURE: X \_\_\_\_\_  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Waste
NDFAA	PAI LAWRENCE	1350 lb	13931 lb	13960 lb	0.21%	2.43% A		40 gl	
CKC33#57	ASTM C33 COMM	1650 lb	16698 lb	16720 lb	0.13%	1.20% M		24 gl	
MENT	BUZZI CG	584 lb	5640 lb	5640 lb	0.00%				
REDUCE1	WE GRACE ADV/	16.92 oz	169.20 oz	169.00 oz	-0.12%				
11	WR GRACE DAR/	3.50 oz	35.00 oz	34.00 oz	-2.86%				
17ER	WATER	30.5 gl	221.6 gl	221.0 gl	-0.28%			221.0 gl	

Material	Design	Actual	To Add
38177 lb	305.0 gl	284.5 gl	20.5 gl
4.00 in	0.0 gl / Load	-2.0 gl /	CYC



# PENNY'S

## CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474



American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 05/02/2014	ACCOUNT BLISS	TRUCK 0122	DRIVER NAME TRAVIS MOONEY	TICKET # 1093634
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TO SIDEWALK ON EAST SIDE OF GEORGE WILLIAMS WAY		
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS -			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		



3,370

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
121		ROCKCHALKREC		COLUMNS		1

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
1.00	CYDS	AG811G	GROUT 2 TO 1 SAN	1	1		
1.00	cy	ECLIPSE2	WR GRACE SHRINKAGE COM	1	1		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

*Rec Center*

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO	BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways and other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

**MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY

\_\_\_\_\_ X  
 CUSTOMER SIGNATURE  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME TITLE

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	2069 lb	2122 lb	2130 lb	0.39%	2.55% A		6 gl	
MENT	BUZZI CG	852 lb	852 lb	860 lb	0.94%				
ASH	HEADWATERS TI	150 lb	150 lb	155 lb	3.33%				
TI	WR GRACE DAR	1.50 oz	1.50 oz	.00 oz	100.00%				
TER	WATER	50.0 gl	25.7 gl	27.0 gl	5.11%			27.0 gl	

Manual	11:06:11
Actual	33.3 gl
To Add:	16.7 gl
Design	50.0 gl
Trim Water:	-18.0 gl /
Water/Cement:	0.411 T
Adjust Water:	0.0 gl / Load
Water in Truck:	0.0 gl
Design W/C:	0.416
Num Batches:	1
3370 lb	
1.00 in #	



# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
An Equal Opportunity Employer




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 05/08/2014	ACCOUNT BLISS	TRUCK 0137	DRIVER NAME BRIAN LINDELOF	TICKET # 1093794		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO PUMP				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 6	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION SOD	PREVIOUS TRUCK 112	SLUMP 5	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-564	4000 PSI NO AE	170	170		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT 12A	ARRIVE JOB 259	START UNLOAD 1239	FINISH UNLOAD 1246
LEAVE JOB 1440	ARRIVE PLANT 1453	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side

RECEIVED IN GOOD CONDITION BY

PRINTED NAME

TITLE

CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
MENT	BUZZI CG	564 lb	5640 lb	5645 lb	0.09%				
	CKC33#5; ASTM C33 COMM	1717 lb	17222 lb	17260 lb	0.22%	0.30% M		6 gl	
	NDFAA PAI LAWRENCE	1405 lb	14397 lb	14450 lb	0.37%	2.47% A		42 gl	
	ATER WATER	33.9 gl	271.2 gl	271.0 gl	-0.08%			271.0 gl	
	REDUCE1 WE GRACE ADV/	16.92 oz	169.20 oz	168.00 oz	-0.71%				

Material	Design W/C	Water/Cement	Design	Actual	Manual
39627 lb	0.502	0.501 T	339.0 gl	318.9 gl	12.35 17
5.00 in #	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water
				-2.0 gl /	CY



# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
 SHAWNEE MISSION, KANSAS 66227-2705  
 DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
 (800) 322-9710 (800) 524-6474

www.pennysconcrete.com  
 An Equal Opportunity Employer



American Concrete Institute  
 Certifications



KANSAS  
 CERTIFICATIONS

PLANT 01	DATE 05/08/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1093764
CUSTOMER NAME BLISS SPORTS LLC JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO PUMP		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 7	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP 3	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
1.00	yd	AG809G	8 SACK AE FA GRO	1	1		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 8:18	ARRIVE JOB 8:25	START UNLOAD 8:40	FINISH UNLOAD 8:48
LEAVE JOB 8:45	ARRIVE PLANT 9:00	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal			

SUBTOTAL  
 TAX  
 TOTAL  
 GRAND TOTAL

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and/or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_  
 NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Waste
NDFAA	PAI LAWRENCE	2518 lb	2583 lb	2620 lb	+	1.44%	2.57% A		
MENT	BUZZI CG	640 lb	640 lb	655 lb		2.34%		8 gl	
ASH	HEADWATERS TI	112 lb	112 lb	125 lb	+	11.61%			
ATER	WATER	35.0 gl	27.2 gl	28.0 gl	*	2.81%		28.0 gl	
ti	WR GRACE DAR	1.50 oz	1.50 oz	00 oz		100.00%			

ual	Num Batches	1					Manual	8 05 03				
id	3634 lb	Design W/C	0.388	Water/Cement	0.384	A	Design	35.0 gl	Actual	35.9 gl	To Add	0.0 gl
mp	3.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water	0.0 gl /	CY			



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
CONCRETE INSTITUTE  
Certifications

PLANT 01	DATE 05/12/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1093867		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO JOB (BRUCE W/ LITHKO) ISOLATIONS				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS							
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 8	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION INT-FW	PREVIOUS TRUCK 184		
SLUMP 5							
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
5.00	yd	40-564	4000 PSI NO AE	11	11		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT 1200	ARRIVE JOB 1220	START UNLOAD 1225	FINISH UNLOAD 1305
LEAVE JOB 1228	ARRIVE PLANT 1235	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS		yds gal	yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mortar gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.  
MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME: Cases TITLE: \_\_\_\_\_

CUSTOMER SIGNATURE: \_\_\_\_\_

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
MENT	BUZZI CG	564 lb	2820 lb	2840 lb	0.71%				
CKC33#5	ASTM C33 COMM	1717 lb	8611 lb	8630 lb	0.22%	0.30% M		3 gl	
NDFAA	PAI LAWRENCE	1405 lb	7252 lb	7280 lb	0.39%	3.23% A		27 gl	
TER	WATER	33.9 gl	129.2 gl	129.0 gl	-0.16%			129.0 gl	
REDUCE1	WE GRACE ADV	16.92 oz	84.60 oz	83.00 oz	-1.89%				

ual	Num Batches	1	Manual	11 58 00								
id	19832 lb	Design W/C	0.502	Water/Cement	0.498	T	Design	169.5 gl	Actual	159.4 gl	To Add	10.1 gl
mp	5.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water	-2.0 gl /	CYL			



# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
Department of Transportation  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 05/12/2014	ACCOUNT BLISS	TRUCK 0206	DRIVER NAME Wayne Grammer	TICKET # 1093865		
CUSTOMER NAME BLISS SPORTS LLC JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO JOB (BRUCE W/LITHKO) STAIR PANS				
			5,978	NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!			
ORDER # 9	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION ESTEPS	PREVIOUS TRUCK 195		
SLUMP 5							
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
1.50	CYDS	40-590R	4K NO-AE.44 CA5	3	3		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
						SUBTOTAL	
						TAX	
						TOTAL	
						GRAND TOTAL	

LEAVE PLANT 9:41	ARRIVE JOB 9:58	START UNLOAD 10:02	FINISH UNLOAD 11:58
LEAVE JOB 12:06	ARRIVE PLANT 12:19	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

	
PRINTED NAME	CUSTOMER SIGNATURE
TITLE	NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Denial	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1404 lb	2160 lb	2180 lb	0.94%	2.55% A		6 gl	
CKCA5	KDOT CA-5 (SCA)	1716 lb	2589 lb	2610 lb	0.79%	0.60% M		2 gl	
MENT	BUZZI CG	590 lb	885 lb	885 lb	0.00%				
REDUCE1	WE GRACE ADV	29.50 oz	44.25 oz	45.00 oz	1.69%				
WATER		31.9 gl	36.6 gl	36.0 gl	-1.55%			36.0 gl	

gal	Num Batches	1				Manual	9.35.31					
yd	5978 lb	Design W/C	0.451	Water/Cement	0.451	T	Design	47.9 gl	Actual	44.4 gl	To Add	3.5 gl
mp	5.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water	-2.0 gl /	CYL			



# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute  
Certifications



Certifications

KANSAS  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 05/14/2014	ACCOUNT BLISS	TRUCK 0159	DRIVER NAME DOUG BERG	TICKET # 1093886
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO JOB (BRUCE W/ LITHKO) ISOLATIONS		
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		



15,843

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
89		ROCKCHALKREC		INVERTS		2	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
4.00	CYDS	40-540	4000 PSI NO AE	4	4		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT 0900	ARRIVE JOB 0919	START UNLOAD 0925	FINISH UNLOAD 0956
LEAVE JOB 1008	ARRIVE PLANT 1024	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1064 density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME: Math of Kings Co TITLE: ASSOC CUSTOMER SIGNATURE: Math

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1428 lb	5863 lb	5860 lb	-0.05%	2.64% A		18 gl	
CKC33#5	ASTM C33 COMM	1745 lb	7043 lb	7060 lb	0.24%	0.90% M		8 gl	
MENT	BUZZI CG	540 lb	2160 lb	2160 lb	0.00%				
TER	WATER	32.4 gl	92.0 gl	91.0 gl	-1.08%			91.0 gl	
REDUCE1	WE GRACE ADV	16.20 oz	64.80 oz	64.00 oz	-1.23%				

ual	Num Batches	1	Manual	8.54.51							
id	15843 lb	Design W/C	0.501	Water/Cement	0.501 T	Design	129.6 gl	Actual	116.6 gl	To Add	13.0 gl
mp	2.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Tm Water	-3.0 gl /	CYC		



# PENNY'S

CONCRETE, INC.

23400 W. 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH: (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute\*  
Certifications



Certifications

KANSAS  
STRUCTURE & TRANSPORTATION  
Certifications

www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	05/16/2014	BLISS	0122	TRAVIS MOONEY	1093996

<b>CUSTOMER NAME</b> BLISS SPORTS LLC	<b>ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS</b> 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO JOB (BRUCE W/ LITHKO) ISOLATIONS
<b>JOB ADDRESS</b> ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS	



39,773

**NOTE:**  
ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES,  
STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
51		ROCKCHALKREC		FOOTING	139	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	120	120		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL  
TAX  
TOTAL  
GRAND TOTAL

LEAVE PLANT	ARRIVE JOB	START UNLOAD	FINISH UNLOAD
LEAVE JOB	ARRIVE PLANT	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal yds gal

**CAUTION!** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.  
**ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK**

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39; air content: ASTM C231 or ASTM C173; Slump: ASTM C143; Temperature: ASTM C1064; density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. **MSDS and Lien Law information on reverse side.**

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_  
PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_  
X \_\_\_\_\_  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
KKC33#57	ASTM C33 COMM	1722 lb	17375 lb	17410 lb	0.20%	0.90% M		19 gl	
NDFAA	PAI LAWRENCE	1409 lb	14615 lb	14620 lb	0.03%	3.73% A		63 gl	
MENT	BUZZI CG	479 lb	4790 lb	4805 lb	0.31%				
ASH	HEADWATERS TI	85 lb	850 lb	950 lb	+ 11.76%				
REDUCE1	WE GRACE ADV/	16.92 oz	169.20 oz	169.00 oz	-0.12%				
TER	WATER	33.9 gl	237.5 gl	237.0 gl	-0.21%			237.0 gl	

Num Batches: 1  
Manual 16:11:40  
Design 339.0 gl Actual 318.6 gl To Add. 20.4 gl  
Water/Cement: 0.492 T Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL  
Water in Truck: 0.0 gl





www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

## CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474



American Concrete Institute  
Certifications



Certifications

KANSAS  
STATEMENT OF REGISTRATION  
Certifications

PLANT 01	DATE 05/19/2014	ACCOUNT BLISS	TRUCK 0184	DRIVER NAME Shawn Cool	TICKET # 1094025
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO END - EAST TO PUMP		
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		



39,675

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
85		ROCKCHALKREC		FOOTING	206	5	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	CYDS	30-564F1	3K PSI NO AE FA	80	80		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT 312	ARRIVE JOB 100	START UNLOAD 424	FINISH UNLOAD 458
LEAVE JOB 502	ARRIVE PLANT 531	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	BEFORE H2O ADDED <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: 2 gal yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

[Signature] [Signature] [Signature]

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_ CUSTOMER SIGNATURE \_\_\_\_\_

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
CKC33#5	ASTM C33 COMM	1722 lb	17375 lb	17390 lb	0.09%	0.90% M		19 gl	
NDFAA	PAJ LAWRENCE	1409 lb	14426 lb	14420 lb	-0.04%	2.39% A		40 gl	
MENT	BUZZI CG	479 lb	4790 lb	4820 lb	0.63%				
(ASH	HEADWATERS TI	85 lb	850 lb	865 lb	+ 1.76%				
REDUCE1	WE GRACE ADV/	18.92 oz	169.20 oz	169.00 oz	-0.12%				
TER	WATER	33.9 gl	260.1 gl	260.0 gl	-0.05%			260.0 gl	

ual	Num Batches	1				Manual	15.38 25		
id	39675 lb Design W/C	0.502	Water/Cement	0.498 T	Design	339.0 gl	Actual	318.9 gl To Add	20.1 gl
mp	5.00 in # Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Term Water	-2.0 gl /	CYE		



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	05/23/2014	BLISS	0159	DOUG BERG	1094111
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - FAR WEST ACCESS RD NORTH TOSOUTH END OF TRACK		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
62	TEC# 000003471	ROCKCHALKPAR		EXTFW		5
		38,243				

QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-A564	4000 PSI AE	10	10		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 09:20	ARRIVE JOB 09:42	START UNLOAD 09:49	FINISH UNLOAD 11:18
LEAVE JOB 11:30	ARRIVE PLANT 11:47	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

SUBTOTAL  
TAX  
TOTAL

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal 3 yds gal yds gal yds gal

CAUTION: Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, nose immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK. GRAND TOTAL

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

*Casey* *Assoc* *x Casey*

PRINTED NAME: \_\_\_\_\_ TITLE: \_\_\_\_\_ CUSTOMER SIGNATURE: \_\_\_\_\_

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NFAA	PAI LAWRENCE	1360 lb	13899 lb	13960 lb	0.44%	2.20% M		36 gl	
CKC33#57	ASTM C33 COMM	1650 lb	16583 lb	16630 lb	0.29%	0.50% M		10 gl	
MENT	BUZZI CG	564 lb	5640 lb	5645 lb	0.09%				
REDUCE1	WE GRACE ADW/	16.92 oz	169.20 oz	169.00 oz	-0.12%				
!1	WR GRACE DAR/	4.00 oz #	40.00 oz	40.00 oz	0.00%				
TER	WATER	30.5 gl	239.3 gl	239.0 gl	-0.11%			239.0 gl	

ual		Num Batches	1				Manual	9 14 31				
id	38243 lb	Design W/C	0.451	Water/Cement	0.451	T	Design	305.0 gl	Actual	284.9 gl	To Add	20.1 gl
mp	5.00 in	#	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trim Water	-2.0 gl /	CYL			



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications



PLANT 01	DATE 05/27/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1094144		
CUSTOMER NAME BLISS SPORTS LLC JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS **8" AFTER SUPER**6TH ST. WEST -GEORGE WILLIAM WAY NORTH TURNWEST - HAUL RD NORTH TO END - EAST TO PUMP				
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
ORDER # 5	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION SOD	PREVIOUS TRUCK 159		
SLUMP 5	39,950						
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-590	4KPSI NO-AE	90	90		
10.00	oz	CONCURE	CONCURE1.0	1	7434		
10.00	oz	SUPER1	WR GRACE ADVA 140M - S	1	2832		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
					SUBTOTAL		
					TAX		
					TOTAL		
					GRAND TOTAL		

LEAVE PLANT 11:55	ARRIVE JOB 1:30	START UNLOAD 1:40	FINISH UNLOAD 1:00
LEAVE JOB 1:10	ARRIVE PLANT 1:30	TEST CYLINDERS TAKEN BEFORE H2O ADDED	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO
PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS: yds gal yds gal yds gal			

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

MSDS and Lien Law information on reverse side

RECEIVED IN GOOD CONDITION BY

*[Signature]*

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
MENT	BUZZI CG	590 lb	5900 lb	5905 lb	0.08%				
CKC33#5	ASTM C33 COMM	1728 lb	17315 lb	17340 lb	0.15%	0.20% M		4 gl	
NDFAA	PAI LAWRENCE	1412 lb	14506 lb	14500 lb	-0.04%	2.73% A		46 gl	
TER	WATER	31.8 gl	257.6 gl	258.0 gl	0.15%			258.0 gl	
REDUCE1	WE GRACE ADV/	35.40 oz	354.00 oz	354.00 oz	0.00%				
NCURE	CONCURE	82.60 oz	826.00 oz	00 oz	100.00%				
PER1	WE GRACE ADV/	47.20 oz #	472.00 oz	471.00 oz	-0.21%				

Num Batches	1	Manual	10 59 13
Design W/C	0.450	Water/Cement	0.449 T
Design	318.0 gl	Actual	308.4 gl
Design	0.0 gl / Load	Trim Water	-1.0 gl /
Design	318.0 gl	To Add	9.6 gl
Design	0.0 gl / Load	CYI	



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 05/27/2014	ACCOUNT BLISS	TRUCK 0123	DRIVER NAME TIMOTHY BELTON	TYCKET # 1094156
CUSTOMER NAME BLISS SPORTS LLC JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO END - EAST TO PUMP		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP	
74		ROCKCHALKREC		WALL	112	5	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
2.25	yd	40-A564	4000 PSI AE	62.25	62.25		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT 3:37	ARRIVE JOB 3:52	START UNLOAD 3:57	FINISH UNLOAD 4:27
LEAVE JOB 4:42	ARRIVE PLANT 4:45	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water if any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways and other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and/or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

PRINTED NAME

TITLE

CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1360 lb	3155 lb	3170 lb	0.48%	3.10% M		11	gl
CKC33#57	ASTM C33 COMM	1650 lb	3720 lb	3720 lb	0.00%	0.20% M		1	gl
MENT	BUZZI CG	564 lb	1289 lb	1305 lb	2.84%				
REDUCE1	WE GRACE ADV/	16.92 oz	38.07 oz	38.00 oz	-0.18%				
11	WR GRACE DAR/	4.00 oz #	9.00 oz	9.00 oz	0.00%				
1TER	WATER	30.5 gl	51.9 gl	51.0 gl	-1.67%			51.0	gl

ual		Num Batches	1					Manual	15 31 56
id	8624 lb	Design W/C	0.451	Water/Cement	0.439 T	Design	68.6 gl	Actual	63.3 gl To Add 5.3 gl
mp	5.00 in #	Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trm Water	-2.0 gl /	CYL	



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 05/27/2014	ACCOUNT BLISS	TRUCK 0206	DRIVER NAME Wayne Grammer	TICKET # 1094132
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO END - EAST TO PUMP		
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS					
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER # 9	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP 3	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
1.00	yd	AG809G	8 SACK AE FA GRO	1	1		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

SUBTOTAL

TAX

TOTAL

GRAND TOTAL

LEAVE PLANT <i>[Signature]</i>	ABBW# JOB <i>[Signature]</i>	START ON ROAD <i>[Signature]</i>	FINISH UNLOAD <i>[Signature]</i>
LEAVE JOB <i>[Signature]</i>	ARRIVE PLANT <i>[Signature]</i>	TEST CYLINDERS TAKEN BEFORE H2O ADDED	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

CAUTION: Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways all other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery. If ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature, ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY

*[Signature]*  
PRINTED NAME

TITLE

*[Signature]*  
CUSTOMER SIGNATURE

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	2518 lb	2579 lb	2590 lb	0.41%	2.44% A		7	gl
MENT	BUZZI CG	640 lb	640 lb	640 lb	0.00%				
ASH	HEADWATERS TI	112 lb	112 lb	115 lb	2.68%				
ATER	WATER	35.0 gl	25.6 gl	25.0 gl	-2.50%			25.0	gl
IT	WR GRACE DARV	1.50 oz	1.50 oz	00 oz	100.00%				

ual		Num Batches	1				Manual	6 41 01				
id	3554 lb	Design W/C	0.388	Water/Cement	0.387	T	Design	35.0 gl	Actual	32.4 gl	To Add	2.6 gl
mp	3.00 in	# Water in Truck	0.0 gl	Adjust Water	0.0 gl / Load	Trm Water	-2.0 gl /	CY[C				



www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications

KANSAS  
DEPARTMENT OF TRANSPORTATION  
Certifications

PLANT 01	DATE 05/28/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1094184		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 8" AFTER SUPER**** 6TH ST. WEST- GEORGE WILLIAM WAY NORTH TURNWEST - HAUL RD NORTH TO END -EAST TO PUMP				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
			39,924				
ORDER # 7	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION SOD	PREVIOUS TRUCK 117	SLUMP 4	
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
10.00	yd	40-590	4KPSI. NO-AE	120	110		
10.00	oz	CONCURE	CONCURE1.0	1	9086		
10.00	oz	SUPER1	WR GRACE ADVA 140M - S	1	3894		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
SUBTOTAL							
TAX							
TOTAL							
GRAND TOTAL							

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and/or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards: Compressive strength: ASTM C31 & ASTM C39, air content: ASTM C231 or ASTM C173, Slump: ASTM C143, Temperature: ASTM C1064, density and/or yield: ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1412 lb	14507 lb	14500 lb	-0.05%	2.74% A		46 gl	
CKC33#5	ASTM C33 COMM	1728 lb	17366 lb	17380 lb	0.08%	0.50% M		10 gl	
MENT	BUZZI CG	590 lb	5900 lb	5905 lb	0.08%				
REDUCE1	WE GRACE ADV	23.60 oz	236.00 oz	235.00 oz	-0.42%				
TER	WATER	31.8 gl	251.3 gl	251.0 gl	-0.12%			251.0 gl	
NCURE	CONCURE	82.60 oz	826.00 oz	00 oz	100.00%				
PER1	WE GRACE ADV	47.20 oz	472.00 oz	472.00 oz	0.00%				

Num Batches	1	Manual	10 29 16
Design W/C	0.450	Design	318.0 gl
Water/Cement	0.449	Actual	307.7 gl
Water in Truck	0.0 gl	To Add	10.3 gl
Adjust Water	0.0 gl / Load	Trm Water	-1.0 gl / CYC





# PENNY'S

CONCRETE, INC.

23400 W 82ND STREET

SHAWNEE MISSION, KANSAS 66227-2705

DISPATCH (913) 441-4197 OFFICE (913) 441-8781

(800) 322-9710 (800) 524-6474




American Concrete Institute  
Certifications



Certifications



www.pennysconcrete.com  
An Equal Opportunity Employer

PLANT 01	DATE 05/28/2014	ACCOUNT BLISS	TRUCK 0139	DRIVER NAME Kevin Tolbert	TICKET # 1094162		
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS 6TH ST. WEST - GEORGE WILLIAM WAY NORTH TURNS WEST - HAUL RD NORTH TO END - EAST TO PUMP				
JOB ADDRESS ROCK CHALK PARK - REC. & WELNESS CENTER - LAWRENCE, KS			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!				
			3,660				
ORDER # 9	PO#	PROJECT CODE ROCKCHALKREC	JOB#	APPLICATION	PREVIOUS TRUCK 3		
QTY	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
1.00	yd	AG809G	8 SACK AE FA GRO	1	1		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			
SUBTOTAL							
TAX							
TOTAL							
GRAND TOTAL							

LEAVE PLANT 6:45	ARRIVE JOB 7:00	START UNLOAD 7:00	FINISH UNLOAD 7:00
LEAVE JOB 7:30	ARRIVE PLANT 7:50	TEST CYLINDERS TAKEN BEFORE H2O ADDED <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

CAUTION! Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side. ANY WATER ADDED TO MIX ON THE JOB WILL BE AT THE PURCHASER'S RISK.

DELIVERY AGREEMENT: This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, all other property, and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel, and as a result of this condition the truck requires towing, towing will be at the customer's expense.

PRODUCT PERFORMANCE: All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards. Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1064, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

ADDITIONAL INFORMATION: Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched. MSDS and Lien Law information on reverse side.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

CUSTOMER SIGNATURE \_\_\_\_\_

NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

Material	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wet
NDFAA	PAI LAWRENCE	2518 lb	2588 lb	2650 lb	+	2.40%	2.77% A		9 gl
MENT	BUZZI CG	640 lb	640 lb	640 lb		0.00%			
ASH	HEADWATERS TI	112 lb	112 lb	145 lb	+	29.46%			
ATER	WATER	35.0 gl	26.6 gl	27.0 gl	+	1.39%		27.0 gl	
TI	WR GRACE DAR	1.50 oz	1.50 oz	00 oz		100.00%			

Manual	6.38	47
Actual	35.6	gl To Add
Design	35.0	gl
Water/Cement	0.378	A
Design	35.0	gl / Load
Water in Truck	0.0	gl
Adjust Water	0.0	gl / Load
Manual	6.38	47
Actual	35.6	gl To Add
Design	35.0	gl
Water/Cement	0.388	
Design	35.0	gl
Water in Truck	0.0	gl
Adjust Water	0.0	gl / Load





www.pennysconcrete.com  
An Equal Opportunity Employer

# PENNY'S

## CONCRETE, INC.

23400 W 82ND STREET  
SHAWNEE MISSION, KANSAS 66227-2705  
DISPATCH (913) 441-4197 OFFICE (913) 441-8781  
(800) 322-9710 (800) 524-6474




American Concrete Institute\*  
Certifications



Certifications

KANSAS  
CERTIFICATION BOARD  
Certifications

PLANT	DATE	ACCOUNT	TRUCK	DRIVER NAME	TICKET #
01	05/29/2014	BLISS	0136	SHAD HORCHEM	1094218
CUSTOMER NAME BLISS SPORTS LLC			ADDITIONAL DIRECTIONS AND/OR SPECIAL INSTRUCTIONS		
JOB ADDRESS 6100 ROCK CHALK DR - ROCK CHALK PARK - LAWRENCE, KS			6TH ST. WEST - GEORGE WILLIAMS WAY NORTH - FIRST CONCRETE RD WEST - FAR WEST ACCESS RD NORTH TOSOUTH END OF TRACK		
			NOTE: ALL DRIVERS MUST WEAR A HARD HAT, SAFETY GLASSES, STEEL TOE BOOTS, AND SAFETY VEST ON EVERY JOB!		

ORDER #	PO#	PROJECT CODE	JOB#	APPLICATION	PREVIOUS TRUCK	SLUMP
119	TEC# 000003471 8	ROCKCHALKPAR		SIDEWLK	123	5

QTY.	UNIT	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
3.00	yd	40-A564	4000 PSI AE	12	12		
1.00	ea	FUELINV	FUEL SURCHARGE - PER I	0			

LEAVE PLANT 1353	ARRIVE JOB 1409	START UNLOAD 1410	FINISH UNLOAD 1440
LEAVE JOB 1450	ARRIVE PLANT 1638	TEST CYLINDERS TAKEN <input type="checkbox"/> YES <input type="checkbox"/> NO BEFORE H2O ADDED <input type="checkbox"/> YES <input type="checkbox"/> NO	

SUBTOTAL	
TAX	
TOTAL	

PURCHASER OR HIS AUTHORIZED REPRESENTATIVE ACCEPTS RECEIPT OF THIS LOAD OF MATERIAL AND HAS INSTRUCTED THE DRIVER TO ADD WATER AS FOLLOWS yds gal yds gal yds gal yds gal

**CAUTION:** Cement powder or freshly mixed concrete, grout or mortar may cause skin injury. Avoid contact with skin and wash exposed areas promptly with water. If any cement powder or mixture gets into the eyes, rinse immediately and repeatedly with water, and get prompt medical attention. Keep children away from all freshly mixed cement products. MSDS on reverse side.

**DELIVERY AGREEMENT:** This purchase agreement is for delivery to the curb line. In the event Purchaser requests delivery beyond the curb line, the Purchaser hereby assumes liability for damages to sidewalks, driveways, and other property and personal injury. Purchaser hereby agrees to indemnify and hold the Seller harmless against all liability, loss or expense incurred as the result of such delivery if ground conditions beyond the curb line are inadequate for heavy truck travel and as a result of this condition the truck requires towing, towing will be at the customer's expense.

**PRODUCT PERFORMANCE:** All concrete sold on a basis of compressive strength, air-entrainment, slump, temperature, density and or yield must be sampled at the mixer truck discharge in accordance to ASTM C172 and tested according to the applicable ASTM testing standards: Compressive strength ASTM C31 & ASTM C39, air content ASTM C231 or ASTM C173, Slump ASTM C143, Temperature ASTM C1084, density and or yield ASTM C138. Slump and air-entrainment variances in accordance to ASTM C94 are applicable. Unless identified in writing, no other condition of sale shall apply. Customer assumes all responsibility for the placement, consolidation, curing, and protection of all concrete after delivery to the curb line. The placement, consolidation, curing, and protection of all concrete can greatly affect its performance. The seller is not responsible for any product performance after placement is made by the customer.

**ADDITIONAL INFORMATION:** Ambient conditions may produce rapid evaporation of moisture from the concrete surface. As a result, plastic shrinkage cracking may occur. Precautions should be taken. Drying shrinkage is an inherent, unavoidable property of concrete and precautions should be taken to minimize random cracking. Control joints must be properly constructed with reference to location, spacing, depth and timing. Materials hereby sold become property of purchaser at point of origin. The purchaser shall in no event accept deliveries of materials not in accord with the agreement of the parties, but such materials shall be refused by the purchaser and returned to the seller with a written statement of the reason for the refusal thereof. No cancellation accepted after concrete has been batched.

RECEIVED IN GOOD CONDITION BY \_\_\_\_\_

\_\_\_\_\_ X  
CUSTOMER SIGNATURE  
NO WARRANTY IMPLIED OR EXPRESSED ON PRODUCT

PRINTED NAME \_\_\_\_\_ TITLE \_\_\_\_\_

Item	Description	Design Qty	Required	Batched	% Var	% Moisture	% AbsP	Actual	Wat
NDFAA	PAI LAWRENCE	1360 lb	4191 lb	4270 lb	+	1.89%	2.72% A	14	gl
CKC33#5	ASTM C33 COMM	1650 lb	4975 lb	4980 lb		0.11%	0.50% M	3	gl
MENT	BUZZI CG	564 lb	1692 lb	1695 lb		0.18%			
REDUCE1	WE GRACE ADV/	16.92 oz	50.76 oz	50.00 oz		-1.50%			
t1	WR GRACE DAR/	4.00 oz #	12.00 oz	12.00 oz		0.00%			
WATER	WATER	30.5 gl	69.2 gl	68.0 gl		-1.80%		68.0	gl

Manual	13.46	16
Actual	84.5	gl
To Add	7.0	gl
CYL		

Num Batches	1
Design W/C	0.451
Water/Cement	0.451
Adjust Water	0.0
Design	91.5
gl / Load	0.0
Trim Water	-2.0
gl /	